



ANSI/ASHRAE/IESNA Addenda a, b, c, g, h, i, j, k, l,
m, n, p, q, s, t, u, w, y, ad, and aw to
ANSI/ASHRAE/IESNA Standard 90.1-2007

ASHRAE ADDENDA

2008 SUPPLEMENT

Energy Standard for Buildings Except Low-Rise Residential Buildings

See Appendix for approval dates.

This standard is under continuous maintenance by a Standing Standard Project Committee (SSPC) for which the Standards Committee has established a documented program for regular publication of addenda or revisions, including procedures for timely, documented, consensus action on requests for change to any part of the standard. The change submittal form, instructions, and deadlines may be obtained in electronic form from the ASHRAE Web site, <http://www.ashrae.org>, or in paper form from the Manager of Standards. The latest edition of an ASHRAE Standard may be purchased from ASHRAE Customer Service, 1791 Tullie Circle, NE, Atlanta, GA 30329-2305. E-mail: orders@ashrae.org. Fax: 404-321-5478. Telephone: 404-636-8400 (worldwide), or toll free 1-800-527-4723 (for orders in US and Canada).

© Copyright 2009 American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.

ISSN 1041-2336



Illuminating
ENGINEERING SOCIETY



www.ansi.org

**American Society of Heating, Refrigerating
and Air-Conditioning Engineers, Inc.**

1791 Tullie Circle NE, Atlanta, GA 30329
www.ashrae.org

SPECIAL NOTE

This American National Standard (ANS) is a national voluntary consensus standard developed under the auspices of the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). *Consensus* is defined by the American National Standards Institute (ANSI), of which ASHRAE is a member and which has approved this standard as an ANS, as “substantial agreement reached by directly and materially affected interest categories. This signifies the concurrence of more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that an effort be made toward their resolution.” Compliance with this standard is voluntary until and unless a legal jurisdiction makes compliance mandatory through legislation.

ASHRAE obtains consensus through participation of its national and international members, associated societies, and public review.

ASHRAE Standards are prepared by a Project Committee appointed specifically for the purpose of writing the Standard. The Project Committee Chair and Vice-Chair must be members of ASHRAE; while other committee members may or may not be ASHRAE members, all must be technically qualified in the subject area of the Standard. Every effort is made to balance the concerned interests on all Project Committees.

The Assistant Director of Technology for Standards and Special Projects of ASHRAE should be contacted for:

- a. interpretation of the contents of this Standard,
- b. participation in the next review of the Standard,
- c. offering constructive criticism for improving the Standard, or
- d. permission to reprint portions of the Standard.

DISCLAIMER

ASHRAE uses its best efforts to promulgate Standards and Guidelines for the benefit of the public in light of available information and accepted industry practices. However, ASHRAE does not guarantee, certify, or assure the safety or performance of any products, components, or systems tested, installed, or operated in accordance with ASHRAE's Standards or Guidelines or that any tests conducted under its Standards or Guidelines will be nonhazardous or free from risk.

ASHRAE INDUSTRIAL ADVERTISING POLICY ON STANDARDS

ASHRAE Standards and Guidelines are established to assist industry and the public by offering a uniform method of testing for rating purposes, by suggesting safe practices in designing and installing equipment, by providing proper definitions of this equipment, and by providing other information that may serve to guide the industry. The creation of ASHRAE Standards and Guidelines is determined by the need for them, and conformance to them is completely voluntary.

In referring to this Standard or Guideline and in marking of equipment and in advertising, no claim shall be made, either stated or implied, that the product has been approved by ASHRAE.

Committee Listings for Addenda a, b, and c

ASHRAE Standing Standard Project Committee 90.1
Cognizant TC: TC 7.6, Systems Energy Utilization
SPLS Liaisons: Hugh F. Crowther and Ross Montgomery
ASHRAE Staff Liaison: Steven C. Ferguson
IESNA Liaison: Rita M. Harrold

Jerry W. White, Jr., <i>Chair*</i>	Jason J. Glazer*	John Montgomery*
James M. Calm, <i>Vice-Chair*</i>	S. Pekka Hakkarainen*	Frank T. Morrison
Michael Schwedler, <i>Vice-Chair*</i>	Susanna S. Hanson	Frank Myers*
Karim Amrane*	Richard V. Heinisch*	Eric E. Richman*
Wagdy Anis*	Ned B. Heminger	Michael I. Rosenberg*
Anthony Arbore	John F. Hogan*	Steven Rosenstock*
William P. Bahnfleth*	William G. Holy*	David A. Schaaf, Jr.*
Peter A. Baselici*	Hyman M. Kaplan*	Leonard C. Sciarra*
Denise M. Beach	Larry Kouma*	Dennis Sczomak*
Donald L. Beaty*	Ronald D. Kurtz*	Bipin Vadilal Shah*
Donald M. Brundage*	Samantha H. LaFleur*	Stephen V. Skalko*
Ken Brendan*	Michael D. Lane*	Maria Spinu*
Ernest A. Conrad*	Dean E. Lewis*	Frank A. Stanonik*
Charles C. Cottrell*	Richard Lord*	Cedric S. Trueman*
Roy Crane*	Kenneth Luther*	Martha G. VanGeem
Keith I. Emerson*	Ronald Majette*	McHenry Wallace, Jr.*
Drake H. Erbe*	Itzhak H. Maor*	Richard D. Watson*
Charles R. Foster, III	Merle F. McBride*	David Weitz*
Allan Fraser*	Michael W. Mehl*	Robin Wilson*
James A. Garrigus*	Harry P. Misuriello	

**Denotes members of voting status when this standard was approved for publication.*

ASHRAE STANDARDS COMMITTEE 2006–2007

David E. Knebel, <i>Chair</i>	James D. Lutz
Stephen D. Kennedy, <i>Vice-Chair</i>	Carol E. Marriott
Michael F. Beda	Merle F. McBride
Donald L. Brandt	Mark P. Modera
Steven T. Bushby	Ross D. Montgomery
Paul W. Cabot	H. Michael Newman
Hugh F. Crowther	Stephen V. Santoro
Samuel D. Cummings, Jr.	Lawrence J. Schoen
Robert G. Doerr	Stephen V. Skalko
Roger L. Hedrick	Bodh R. Subherwal
John F. Hogan	Jerry W. White, Jr.
Eli P. Howard, III	James E. Woods
Frank E. Jakob	Richard D. Hermans, <i>BOD ExO</i>
Jay A. Kohler	Hugh D. McMillan, III, <i>CO</i>

Claire B. Ramspeck, *Assistant Director of Technology for Standards and Special Projects*

Committee Listings for Addenda g, h, i, j, k, l, n, p, q, y, ad, and aw

**ASHRAE Standing Standard Project Committee 90.1
Cognizant TC: TC 7.6, Systems Energy Utilization**

SPLS Liaison: Frank Jakob • ASHRAE Staff Liaison: Steven C. Ferguson • IESNA Liaison: Rita M. Harrold

Schwedler, Mick, Chair*	Drake Erbe*	Michael Mehl*
Hydeman, Mark, Vice Chair*	Charles Foster *	Harry Misuriello
Skalko, Stephen V., Vice Chair*	Allan Fraser *	John Montgomery*
Jerine Ahmed	Jim Garrigus*	Frank Morrison*
Karim Amrane *	Jason Glazer*	Eric Richman*
Wagdy Anis*	Pekka Hakkarainen *	Michael Rosenberg*
Susan Anderson	Susanna Hanson	Steven Rosenstock *
Anthony Arbore	Richard Heinisch *	David Schaaf*
Peter Baselici*	Ned Heminger	Leonard Sciarra*
Randy Blanchette	John Hogan*	Dennis Sczomak*
Jeff Boldt	Larry Kouma*	Maria Spinu*
Larry Brown *	Ronald Kurtz *	Frank Stanonik*
Dave Branson*	Michael Lane*	Jeff Stein
Donald Brundage*	John Lewis *	Christian Taber
Ken Brendan *	Richard Lord*	Mike Tillou
Jim Calm*	Ken Luther	Martha VanGeem *
Ernest Conrad *	Ronald Majette*	McHenry Wallace*
Charles Cottrell *	Itzhak Maor*	Richard Watson*
Craig Drumheller *	Merle McBride *	David Weitz*
Keith Emerson *	Ray McGowan	Jerry White*
		Robin Wilson*

**Denotes members of voting status when the document was approved for publication.*

ASHRAE STANDARDS COMMITTEE 2007–2008

Stephen D. Kennedy, <i>Chair</i>	Nadar R. Jayaraman
Hugh F. Crowther, <i>Vice-Chair</i>	Byron W. Jones
Robert G. Baker	Jay A. Kohler
Michael F. Beda	James D. Lutz
Donald L. Brandt	Carol E. Marriott
Steven T. Bushby	R. Michael Martin
Paul W. Cabot	Merle F. McBride
Kenneth W. Cooper	Frank Myers
Samuel D. Cummings, Jr.	H. Michael Newman
K. William Dean	Lawrence J. Schoen
Robert G. Doerr	Bodh R. Subherwal
Roger L. Hedrick	Jerry W. White, Jr.
Eli P. Howard, III	Bjarne W. Olesen, <i>BOD ExO</i>
Frank E. Jakob	Lynn G. Bellenger, <i>CO</i>

Claire B. Ramspeck, *Assistant Director of Technology for Standards and Special Projects*

Committee Listings for Addenda m, s, t, u, and w

**ASHRAE Standard Project Committee 90.1
Cognizant TC: TC 7.6, Systems Energy Utilization**

SPLS Liaison: Frank Jakob · IESNA Liaison: Rita M. Harrold · ASHRAE Staff Liaison: Steven C. Ferguson

Schwedler, Mick, Chair*	Drake Erbe*	Michael Mehl*
Hydeman, Mark, Vice Chair*	Charles Foster *	Harry Misuriello
Skalko, Stephen V., Vice Chair*	Allan Fraser *	John Montgomery*
Jerine Ahmed	Jim Garrigus*	Frank Morrison*
Karim Amrane *	Jason Glazer*	Eric Richman*
Wagdy Anis*	Pekka Hakkarainen *	Michael Rosenberg*
Susan Anderson	Susanna Hanson	Steven Rosenstock *
Anthony Arbore	Richard Heinisch *	David Schaaf*
Peter Baselici*	Ned Heminger	Leonard Sciarra*
Randy Blanchette	John Hogan*	Dennis Sczomak
Jeff Boldt	Larry Kouma*	Maria Spinu*
Larry Brown *	Ronald Kurtz *	Frank Stanonik*
Dave Branson*	Michael Lane*	Jeff Stein
Donald Brundage*	John Lewis *	Christian Taber
Ken Brendan *	Richard Lord*	Mike Tillou
Jim Calm*	Ken Luther	Martha VanGeem *
Ernest Conrad *	Ronald Majette*	McHenry Wallace*
Charles Cottrell *	Itzhak Maor*	Richard Watson*
Craig Drumheller *	Merle McBride *	David Weitz*
Keith Emerson *	Ray McGowan	Jerry White*
		Robin Wilson*

**Denotes members of voting status when the document was approved for publication.*

ASHRAE STANDARDS COMMITTEE 2008–2009

Hugh F. Crowther, <i>Chair</i>	Carol E. Marriott
Steven T. Bushby, <i>Vice-Chair</i>	R. Michael Martin
Robert G. Baker	Merle F. McBride
Michael F. Beda	Frank Myers
Donald L. Brandt	H. Michael Newman
Paul W. Cabot	Janice C. Peterson
Kenneth W. Cooper	Douglas T. Reindl
Samuel D. Cummings, Jr.	Lawrence J. Schoen
K. William Dean	Boggarm S. Setty
Robert G. Doerr	Bodh R. Subherwal
Allan B. Fraser	William F. Walter
Nadar R. Jayaraman	Michael W. Woodford
Byron W. Jones	David E. Knebel, <i>BOD ExO</i>
Jay A. Kohler	Andrew K. Persily, <i>CO</i>

Claire B. Ramspeck, *Director of Technology*

CONTENTS

ANSI/ASHRAE/IESNA Addenda to ANSI/ASHRAE/IESNA Standard 90.1-2007, Energy Standard for Buildings Except Low-Rise Residential Buildings

SECTION	PAGE
Addendum a.....	5
Addendum b.....	7
Addendum c.....	8
Addendum g.....	9
Addendum h.....	31
Addendum i.....	33
Addendum j.....	38
Addendum k.....	39
Addendum l.....	43
Addendum m.....	45
Addendum n.....	50
Addendum p.....	52
Addendum q.....	54
Addendum s.....	55
Addendum t.....	60
Addendum u.....	62
Addendum w.....	63
Addendum y.....	64
Addendum ad.....	65
Addendum aw.....	66
Appendix.....	67

NOTE

When addenda, interpretations, or errata to this standard have been approved, they can be downloaded free of charge from the ASHRAE Web site at www.ashrae.org.

© Copyright 2009 American Society of Heating,
Refrigerating and Air-Conditioning Engineers, Inc.

1791 Tullie Circle NE
Atlanta, GA 30329
www.ashrae.org
All rights reserved.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Efficiency and certification requirements for open cooling towers were first incorporated into the 2001 edition of Standard 90.1. At the time, closed circuit cooling towers were known as “fluid coolers” with no established certification program and were not covered by these requirements. Since then, however, fluid coolers have become known as “closed circuit cooling towers” and the Cooling Technology Institute adopted a certification standard that covers this equipment. This has led to confusion in the industry with consulting engineers and inspectors on occasion trying to apply the current open circuit cooling tower requirements in the standard to closed circuit cooling towers. This addendum seeks to clarify that the current cooling tower requirements in the standard apply to open circuit cooling towers only, until such time that separate requirements for closed circuit cooling towers are established in the standard.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~strike through~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum a to 90.1-2007

Revise Table 6.8.1G as follows (I-P units):

TABLE 6.8.1G Performance Requirements for Heat Rejection Equipment

Equipment Type^d	Total System Heat Rejection Capacity at Rated Conditions	Subcategory or Rating Condition	Performance Required^{a,b}	Test Procedure^c
Propeller or Axial Fan <u>Open</u> Cooling Towers	All	95°F Entering Water 85°F Leaving Water 75°F wb <i>Outdoor air</i>	38.2 gpm/hp	CTI ATC-105 and CTI STD-201
Centrifugal Fan <u>Open</u> Cooling Towers	All	95°F Entering Water 85°F Leaving Water 75°F wb <i>Outdoor air</i>	20.0 gpm/hp	CTI ATC-105 and CTI STD-201
Air-Cooled Condensers	All	125°F Condensing Temperature R-22 Test Fluid 190°F Entering Gas Temperature 15°F Subcooling 95°F Entering db	176,000 Btu/h-hp	ARI 460

^a For purposes of this table, *open cooling tower performance* is defined as the ~~maximum~~ flow rating of the tower at the thermal rating condition listed in Table 6.8.1G divided by the fan nameplate rated motor power.

^b For purposes of this table, *air-cooled condenser performance* is defined as the heat rejected from the refrigerant divided by the fan nameplate rated motor power.

^c Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

^d The efficiencies for open cooling towers listed in Table 6.8.1G are not applicable for closed-circuit cooling towers.

Revise Table 6.8.1G as follows (S-I units):

TABLE 6.8.1G Performance Requirements for Heat Rejection Equipment

Equipment Type ^d	Total System Heat Rejection Capacity at Rated Conditions	Subcategory or Rating Condition	Performance Required ^{a,b}	Test Procedure ^c
Propeller or Axial Fan <u>Open</u> Cooling Towers	All	35°C Entering Water 29°C Leaving Water 24°C wb <i>Outdoor air</i>	3.23 L/s·kW	CTI ATC-105 and CTI STD-201
Centrifugal Fan <u>Open</u> Cooling Towers	All	35°C Entering Water 29°C Leaving Water 24°C wb <i>Outdoor air</i>	1.7 L/s·kW	CTI ATC-105 and CTI STD-201
Air-Cooled Condensers	All	52°C Condensing Temperature R-22 Test Fluid 88°C Entering Gas Temperature 8°C Subcooling 35°C Entering db	69 COP	ARI 460

^a For purposes of this table, *open cooling tower performance* is defined as the ~~maximum~~ flow rating of the tower at the thermal rating condition listed in Table 6.8.1G divided by the fan nameplate rated motor power.

^b For purposes of this table, *air-cooled condenser performance* is defined as the heat rejected from the refrigerant divided by the fan nameplate rated motor power.

^c Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

^d The efficiencies for open cooling towers listed in Table 6.8.1G are not applicable for closed-circuit cooling towers.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Some facilities covered by Standard 90.1 are challenged to demonstrate compliance with fan power limitations requirements of Standard 90.1 while including design features protecting the safety of inhabitants and compliance of other applicable standards, codes, laws, or regulations. These facilities often require compliance with NIH, NFPA, and other standards with air control and conditioning more stringent than Standard 90.1 and 62.1 requirements. An example of these facilities is vivariums. In exception section 6.5.2.3 (a) of Standard 90.1-2004, the reference to the requirements of Standard 62.1 as the minimum ventilation required is an example of this conflict. This addendum corrects the reference by eliminating the specific section and denoting only Standard 62.1 and

allows for another, higher outdoor ventilation rate to be set by the regulating body for these specific applications.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum b to 90.1-2007

Revise the exceptions in Section 6.5.2.3 as follows (I-P and S-I units):

6.5.2.3

Exceptions:

- a. The system is capable of reducing supply air volume to 50% or less of the design airflow rate or the minimum outdoor air ventilation rate specified in ~~6.2 of~~ ASHRAE Standard 62.1 or other applicable federal, state or local code or recognized standard, whichever is larger, before simultaneous heating and cooling takes place.

The remainder of Section 6.5.2.3 remains unchanged.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Some facilities covered by Standard 90.1 are challenged to demonstrate compliance with fan power limitations requirements of Standard 90.1 while including design features protecting the safety of inhabitants and compliance of other applicable standards, codes, laws, or regulations. These facilities often require compliance with NIH, NFPA, and other standards with air control and conditioning more stringent than Standard 90.1 and 62.1 requirements. An example of these facilities is vivariums. In ASHRAE Standard 90.1-2004 Section 6.5.2.3, Exception (d), this application was not included. This addendum adds vivariums to the list of spaces that require specific humidity levels to satisfy process needs.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum c to 90.1-2007

Revise the exceptions in Section 6.5.2.3 as follows (I-P and S-I units):

6.5.2.3

Exceptions:

- d. Systems serving spaces where specific humidity levels are required to satisfy process needs such as vivariums, museums, surgical suites and buildings with refrigerating systems such as supermarkets, refrigerated warehouses and ice arenas. This exception also applies to other applications for which fan volume controls in accordance with Exception (a) are proven to be impractical to the enforcement agency.

The remainder of Section 6.5.2.3 remains unchanged.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This addendum updates the building envelope criteria for metal buildings for the first time since Standard 90.1-1999. Other envelope criteria were updated through addenda as and at to Standard 90.1-2004.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and

~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum g to Standard 90.1-2007

Revise the standard as follows (I-P and SI units):

Add the following definition to Section 3.2:

liner system (Ls): a continuous vapor barrier liner installed below the purlins and uninterrupted by framing members.

Add the following abbreviation to Section 3.3:

Ls liner system

Modify Section 5 as follows (I-P units):

TABLE 5.5-1 Building Envelope Requirements For Climate Zone 1 (A, B)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.063	R-15.0 c.i.	U-0.048	R-20.0 c.i.	U-0.218	R-3.8 ci
Metal Building ^a	U-0.065	R-19.0	U-0.065	R-19.0	U-1.280 <u>U-0.167</u>	NR <u>R-6.0</u>
Attic and Other	U-0.034	R-30.0	U-0.027	R-38.0	U-0.081	R-13.0
<i>Walls, Above-Grade</i>						
Mass	U-0.580	NR	U-0.151 ^{ab}	R-5.7 c.i. ^{ab}	U-0.580	NR
Metal Building	U-0.113 <u>U-0.093</u>	R-13.0 <u>R-16.0</u>	U-0.113 <u>U-0.093</u>	R-13.0 <u>R-16.0</u>	U-1.180 <u>U-0.113</u>	NR <u>R-13.0</u>
Steel-Framed	U-0.124	R-13.0	U-0.124	R-13.0	U-0.352	NR
Wood-Framed and Other	U-0.089	R-13.0	U-0.089	R-13.0	U-0.292	NR
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-1.140	NR	C-1.140	NR	C-1.140	NR
<i>Floors</i>						
Mass	U-0.322	NR	U-0.322	NR	U-0.322	NR
Steel-Joist	U-0.350	NR	U-0.350	NR	U-0.350	NR
Wood-Framed and Other	U-0.282	NR	U-0.282	NR	U-0.282	NR
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.730	NR	F-0.730	NR	F-0.730	NR
Heated	F-1.020	R-7.5 for 12 in.	F-1.020	R-7.5 for 12 in.	F-1.020	R-7.5 for 12 in.
<i>Opaque Doors</i>						
Swinging	U-0.700		U-0.700		U-0.700	
Nonswinging	U-1.450		U-1.450		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{bc}	U-1.20		U-1.20		U-1.20	
Metal framing (curtainwall/storefront) ^{ed}	U-1.20	SHGC-0.25 all	U-1.20	SHGC-0.25 all	U-1.20	SHGC-NR all
Metal framing (entrance door) ^{ed}	U-1.20		U-1.20		U-1.20	
Metal framing (all other) ^{ed}	U-1.20		U-1.20		U-1.20	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.98	SHGC _{all} -0.36	U _{all} -1.98	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.98	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -0.16	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -1.90	SHGC _{all} -0.34	U _{all} -1.90	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.90	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -1.36	SHGC _{all} -0.36	U _{all} -1.36	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.36	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^{ab}Exception to Section A3.1.3.1 applies.

^{bc}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{ed}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-2 Building Envelope Requirements For Climate Zone 2 (A, B)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.218	R-3.8 c.i.
Metal Building ^a	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.167 U-0.097	R-6.0 R-10.0
Attic and Other	U-0.027	R-38.0	U-0.027	R-38.0	U-0.081	R-13.0
<i>Walls, Above-Grade</i>						
Mass	U-0.151 ^{ab}	R5.7 c.i. ^{ab}	U-0.123	R-7.6 c.i.	U-0.580	NR
Metal Building	U-0.113 U-0.093	R-13.0 R-16.0	U-0.113 U-0.093	R-13.0 R-16.0	U-0.184 U-0.113	R-6.0 R-13.0
Steel-Framed	U-0.124	R-13.0	U-0.064	R-13.0 + R-7.5 c.i.	U-0.124	R-13.0
Wood-Framed and Other	U-0.089	R-13.0	U-0.089	R-13.0	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-1.140	NR	C-1.140	NR	C-1.140	NR
<i>Floors</i>						
Mass	U-0.107	R-6.3 c.i.	U-0.087	R-8.3 c.i.	U-0.322	NR
Steel-Joist	U-0.052	R-19.0	U-0.052	R-19.0	U-0.069	R-13.0
Wood-Framed and Other	U-0.051	R-19.0	U-0.033	R-30.0	U-0.066	R-13.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.730	NR	F-0.730	NR	F-0.730	NR
Heated	F-1.020	R-7.5 for 12 in.	F-1.020	R-7.5 for 12 in.	F-1.020	R-7.5 for 12 in.
<i>Opaque Doors</i>						
Swinging	U-0.700		U-0.700		U-0.700	
Nonswinging	U-1.450		U-0.500		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{bc}	U-0.75		U-0.75		U-1.20	
Metal framing (curtainwall/storefront) ^{ed}	U-0.70	SHGC-0.25 all	U-0.70	SHGC-0.25 all	U-1.20	SHGC-NR all
Metal framing (entrance door) ^{ed}	U-1.10		U-1.10		U-1.20	
Metal framing (all other) ^{ed}	U-0.75		U-0.75		U-1.20	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.98	SHGC _{all} -0.36	U _{all} -1.98	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.98	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -1.90	SHGC _{all} -0.39	U _{all} -1.90	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.90	SHGC _{all} -0.34	U _{all} -1.90	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -1.36	SHGC _{all} -0.36	U _{all} -1.36	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.36	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^{ab}Exception to Section A3.1.3.1 applies.

^{bc}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{ed}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-3 Building Envelope Requirements For Climate Zone 3 (A, B, C)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.173	R-5.0 c.i.
Metal Building ^a	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.097	R-10.0
Attic and Other	U-0.027	R-38.0	U-0.027	R-38.0	U-0.053	R-19.0
<i>Walls, Above-Grade</i>						
Mass	U-0.123	R-7.6 c.i.	U-0.104	R-9.5 c.i.	U-0.580	NR
Metal Building	U-0.113 U-0.084	R-13.0 R-19.0	U-0.113 U-0.084	R-13.0 R-19.0	U-0.184 U-0.113	R-6.0 R-13.0
Steel-Framed	U-0.084	R-13.0 + R-3.8 c.i.	U-0.064	R-13.0 + R-7.5 c.i.	U-0.124	R-13.0
Wood-Framed and Other	U-0.089	R-13.0	U-0.089	R-13.0	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-1.140	NR	C-1.140	NR	C-1.140	NR
<i>Floors</i>						
Mass	U-0.107	R-6.3 c.i.	U-0.087	R-8.3 c.i.	U-0.322	NR
Steel-Joist	U-0.052	R-19.0	U-0.052	R-19.0	U-0.069	R-13.0
Wood-Framed and Other	U-0.051	R-19.0	U-0.033	R-30.0	U-0.066	R-13.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.730	NR	F-0.730	NR	F-0.730	NR
Heated	F-0.900	R-10 for 24 in.	F-0.900	R-10 for 24 in.	F-1.020	R-7.5 for 12 in.
<i>Opaque Doors</i>						
Swinging	U-0.700		U-0.700		U-0.700	
Nonswinging	U-1.450		U-0.500		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{b,c}	U-0.65		U-0.65		U-1.20	
Metal framing (curtainwall/storefront) ^{e,d}	U-0.60	SHGC-0.25 all	U-0.60	SHGC-0.25 all	U-1.20	SHGC-NR all
Metal framing (entrance door) ^{e,d}	U-0.90		U-0.90		U-1.20	
Metal framing (all other) ^{e,d}	U-0.65		U-0.65		U-1.20	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.17	SHGC _{all} -0.39	U _{all} -1.17	SHGC _{all} -0.36	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.17	SHGC _{all} -0.19	U _{all} -1.17	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -1.30	SHGC _{all} -0.65	U _{all} -1.30	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.30	SHGC _{all} -0.34	U _{all} -1.30	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -0.69	SHGC _{all} -0.39	U _{all} -0.69	SHGC _{all} -0.36	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.69	SHGC _{all} -0.19	U _{all} -0.69	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^{b,c}Exception to Section A3.1.3.1 applies.

^{b,c}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{e,d}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-4 Building Envelope Requirements For Climate Zone 4 (A, B, C)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.173	R-5.0 c.i.
Metal Building ^a	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.097	R-10.0
Attic and Other	U-0.027	R-38.0	U-0.027	R-38.0	U-0.053	R-19.0
<i>Walls, Above-Grade</i>						
Mass	U-0.104	R-9.5 c.i.	U-0.090	R-11.4 c.i.	U-0.580	NR
Metal Building	U-0.113 U-0.084	R-13.0 R-19.0	U-0.113 U-0.084	R-13.0 R-19.0	U-0.134 U-0.113	R-10.0 R-13.0
Steel-Framed	U-0.064	R-13.0 + R-7.5 c.i.	U-0.064	R-13.0 + R-7.5 c.i.	U-0.124	R-13.0
Wood-Framed and Other	U-0.089	R-13.0	U-0.064	R-13.0 + R-3.8 c.i.	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-1.140	NR	C-0.119	R-7.5 c.i.	C-1.140	NR
<i>Floors</i>						
Mass	U-0.087	R-8.3 c.i.	U-0.074	R-10.4 c.i.	U-0.137	R-4.2 c.i.
Steel-Joist	U-0.038	R-30.0	U-0.038	R-30.0	U-0.069	R-13.0
Wood-Framed and Other	U-0.033	R-30.0	U-0.033	R-30.0	U-0.066	R-13.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.730	NR	F-0.540	R-10 for 24 in.	F-0.730	NR
Heated	F-0.860	R-15 for 24 in.	F-0.860	R-15 for 24 in.	F-1.020	R-7.5 for 12 in.
<i>Opaque Doors</i>						
Swinging	U-0.700		U-0.700		U-0.700	
Nonswinging	U-1.500		U-0.500		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{b,c}	U-0.40		U-0.40		U-1.20	
Metal framing (curtainwall/storefront) ^{e,d}	U-0.50	SHGC-0.40 all	U-0.50	SHGC-0.40 all	U-1.20	SHGC-NR all
Metal framing (entrance door) ^{e,d}	U-0.85		U-0.85		U-1.20	
Metal framing (all other) ^{e,d}	U-0.55		U-0.55		U-1.20	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.17	SHGC _{all} -0.49	U _{all} -0.98	SHGC _{all} -0.36	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.17	SHGC _{all} -0.39	U _{all} -0.98	SHGC _{all} -0.19	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -1.30	SHGC _{all} -0.65	U _{all} -1.30	SHGC _{all} -0.62	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.30	SHGC _{all} -0.34	U _{all} -1.30	SHGC _{all} -0.27	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -0.69	SHGC _{all} -0.49	U _{all} -0.58	SHGC _{all} -0.36	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.69	SHGC _{all} -0.39	U _{all} -0.58	SHGC _{all} -0.19	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-5 Building Envelope Requirements For Climate Zone 5 (A, B, C)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.119	R-7.6 c.i.
Metal Building ^a	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.065 U-0.055	R-19.0 R-13.0 + R-13.0	U-0.097 U-0.083	R-10.0 R-13.0
Attic and Other	U-0.027	R-38.0	U-0.027	R-38.0	U-0.053	R-19.0
<i>Walls, Above-Grade</i>						
Mass	U-0.090	R-11.4 c.i.	U-0.080	R-13.3 c.i.	U-0.151 ^{ab}	R-5.7 c.i. ^{ab}
Metal Building	U-0.113 U-0.069	R-13.0 R-13.0 + R- 5.6 c.i.	U-0.057 U-0.069	R-13.0 + R- 13.0 R-13.0 + R- 5.6 c.i.	U-0.123 U-0.113	R-11.0 R-13.0
Steel-Framed	U-0.064	R-13.0 + R-7.5 c.i.	U-0.064	R-13.0 + R-7.5 c.i.	U-0.124	R-13.0
Wood-Framed and Other	U-0.064	R-13.0 + R-3.8 c.i.	U-0.051	R-13.0 + R-7.5 c.i.	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.119	R-7.5 c.i.	C-0.119	R-7.5 c.i.	C-1.140	NR
<i>Floors</i>						
Mass	U-0.074	R-10.4 c.i.	U-0.064	R-12.5 c.i.	U-0.137	R-4.2 c.i.
Steel-Joist	U-0.038	R-30.0	U-0.038	R-30.0	U-0.052	R-19.0
Wood-Framed and Other	U-0.033	R-30.0	U-0.033	R-30.0	U-0.051	R-19.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.730	NR	F-0.540	R-10 for 24 in.	F-0.730	NR
Heated	F-0.860	R-15 for 24 in.	F-0.860	R-15 for 24 in.	F-1.020	R-7.5 for 12 in.
<i>Opaque Doors</i>						
Swinging	U-0.700		U-0.500		U-0.700	
Nonswinging	U-0.500		U-0.500		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, % of Wall</i>						
Nonmetal framing (all) ^{bc}	U-0.35		U-0.35		U-1.20	
Metal framing (curtainwall/storefront) ^{ed}	U-0.45	SHGC-0.40 all	U-0.45	SHGC-0.40 all	U-1.20	SHGC-NR all
Metal framing (entrance door) ^{ed}	U-0.80		U-0.80		U-1.20	
Metal framing (all other) ^{ed}	U-0.55		U-0.55		U-1.20	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.17	SHGC _{all} -0.49	U _{all} -1.17	SHGC _{all} -0.49	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.17	SHGC _{all} -0.39	U _{all} -1.17	SHGC _{all} -0.39	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -1.10	SHGC _{all} -0.77	U _{all} -1.10	SHGC _{all} -0.77	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.10	SHGC _{all} -0.62	U _{all} -1.10	SHGC _{all} -0.62	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -0.69	SHGC _{all} -0.49	U _{all} -0.69	SHGC _{all} -0.49	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.69	SHGC _{all} -0.39	U _{all} -0.69	SHGC _{all} -0.39	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^{ab}Exception to Section A3.1.3.1 applies.

^{bc}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{ed}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-6 Building Envelope Requirements For Climate Zone 6 (A, B)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.093	R-10.0 c.i.
Metal Building ^a	U-0.065 U-0.049	R-19.0 R-13.0 + R-19.0	U-0.065 U-0.049	R-19.0 R-13.0 + R-19.0	U-0.097 U-0.072	R-10.0 R-16.0
Attic and Other	U-0.027	R-38.0	U-0.027	R-38.0	U-0.034	R-30.0
<i>Walls, Above-Grade</i>						
Mass	U-0.080	R-13.3 c.i.	U-0.071	R-15.2 c.i.	U-0.151 ^a	R-5.7 c.i. ^a
Metal Building	U-0.113 U-0.069	R-13.0 R-13.0 + R-5.6 c.i.	U-0.057 U-0.069	R-13.0 + R-13.0 R-13.0 + R-5.6 c.i.	U-0.113	R-13.0
Steel-Framed	U-0.064	R-13.0 + R-7.5 c.i.	U-0.064	R-13.0 + R-7.5 c.i.	U-0.124	R-13.0
Wood-Framed and Other	U-0.051	R-13.0 + R-7.5 c.i.	U-0.051	R-13.0 + R-7.5 c.i.	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.119	R-7.5 c.i.	C-0.119	R-7.5 c.i.	C-1.140	NR
<i>Floors</i>						
Mass	U-0.064	R-12.5 c.i.	U-0.057	R-14.6 c.i.	U-0.137	R-4.2 c.i.
Steel-Joist	U-0.038	R-30.0	U-0.032	R-38.0	U-0.052	R-19.0
Wood-Framed and Other	U-0.033	R-30.0	U-0.033	R-30.0	U-0.051	R-19.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.540	R-10 for 24 in.	F-0.520	R-15 for 24 in.	F-0.730	NR
Heated	F-0.860	R-15 for 24 in.	F-0.688	R-20 for 48 in.	F-1.020	R-7.5 for 12 in.
<i>Opaque Doors</i>						
Swinging	U-0.700		U-0.500		U-0.700	
Nonswinging	U-0.500		U-0.500		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{b,c}	U-0.35		U-0.35		U-0.65	
Metal framing (curtainwall/storefront) ^{e,d}	U-0.45	SHGC-0.40 all	U-0.45	SHGC-0.40 all	U-0.60	SHGC-NR all
Metal framing (entrance door) ^{e,d}	U-0.80		U-0.80		U-0.90	
Metal framing (all other) ^{e,d}	U-0.55		U-0.55		U-0.65	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.17	SHGC _{all} -0.49	U _{all} -0.98	SHGC _{all} -0.46	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.17	SHGC _{all} -0.49	U _{all} -0.98	SHGC _{all} -0.36	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -0.87	SHGC _{all} -0.71	U _{all} -0.74	SHGC _{all} -0.65	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.87	SHGC _{all} -0.58	U _{all} -0.74	SHGC _{all} -0.55	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -0.69	SHGC _{all} -0.49	U _{all} -0.58	SHGC _{all} -0.49	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.69	SHGC _{all} -0.49	U _{all} -0.58	SHGC _{all} -0.39	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-7 Building Envelope Requirements For Climate Zone 7*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.093	R-10.0 c.i.
Metal Building ^a	U-0.065 <u>U-0.049</u>	R-19.0 <u>R-13.0 + R-19.0</u>	U-0.065 <u>U-0.049</u>	R-19.0 <u>R-13.0 + R-19.0</u>	U-0.097 <u>U-0.072</u>	R-10.0 <u>R-16.0</u>
Attic and Other	U-0.027	R-38.0	U-0.027	R-38.0	U-0.034	R-30.0
<i>Walls, Above-Grade</i>						
Mass	U-0.071	R-15.2 c.i.	U-0.071	R-15.2 c.i.	U-0.123	R-7.6 c.i.
Metal Building	U-0.057	R-13.0 + R-13.0 <u>R-19.0 + R-5.6 c.i.</u>	U-0.057	R-13.0 + R-13.0 <u>R-19.0 + R-5.6 c.i.</u>	U-0.113	R-13.0
Steel-Framed	U-0.064	R-13.0 + R-7.5 c.i.	U-0.042	R-13.0 + R-15.6 c.i.	U-0.124	R-13.0
Wood-Framed and Other	U-0.051	R-13.0 + R-7.5 c.i.	U-0.051	R-13.0 + R-7.5 c.i.	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.119	R-7.5 c.i.	C-0.092	R-10.0 c.i.	C-1.140	NR
<i>Floors</i>						
Mass	U-0.064	R-12.5 c.i.	U-0.051	R-16.7 c.i.	U-0.107	R-6.3 c.i.
Steel-Joist	U-0.038	R-30.0	U-0.032	R-38.0	U-0.052	R-19.0
Wood-Framed and Other	U-0.033	R-30.0	U-0.033	R-30.0	U-0.051	R-19.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.520	R-15 for 24 in.	F-0.520	R-15 for 24 in.	F-0.730	NR
Heated	F-0.843	R-20 for 24in.	F-0.688	R-20 for 48 in.	F-0.900	R-10 for 24 in.
<i>Opaque Doors</i>						
Swinging	U-0.500		U-0.500		U-0.700	
Nonswinging	U-0.500		U-0.500		U-1.450	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{b,c}	U-0.35		U-0.35		U-0.65	
Metal framing (curtainwall/storefront) ^{e,d}	U-0.40	SHGC-0.45 all	U-0.40	SHGC-NR all	U-0.60	SHGC-NR all
Metal framing (entrance door) ^{e,d}	U-0.80		U-0.80		U-0.90	
Metal framing (all other) ^{e,d}	U-0.45		U-0.45		U-0.65	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -1.17	SHGC _{all} -0.68	U _{all} -1.17	SHGC _{all} -0.64	U _{all} -1.98	SHGC _{all} -NR
2.1%–5.0%	U _{all} -1.17	SHGC _{all} -0.64	U _{all} -1.17	SHGC _{all} -0.64	U _{all} -1.98	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -0.87	SHGC _{all} -0.77	U _{all} -0.61	SHGC _{all} -0.77	U _{all} -1.90	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.87	SHGC _{all} -0.71	U _{all} -0.61	SHGC _{all} -0.77	U _{all} -1.90	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -0.69	SHGC _{all} -0.68	U _{all} -0.69	SHGC _{all} -0.64	U _{all} -1.36	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.69	SHGC _{all} -0.64	U _{all} -0.69	SHGC _{all} -0.64	U _{all} -1.36	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^{b,c}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{e,d}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-8 Building Envelope Requirements For Climate Zone 8*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.048	R-20.0 c.i.	U-0.048	R-20.0 c.i.	U-0.063	R-15.0 c.i.
Metal Building ^a	U-0.049 U-0.035	R-13.0 + R-19.0 R-11.0 + R-19.0 ls	U-0.049 U-0.035	R-13.0 + R-19.0 R-11.0 + R-19.0 ls	U-0.072 U-0.065	R-16.0 R-19.0
Attic and Other	U-0.021	R-49.0	U-0.021	R-49.0	U-0.034	R-30.0
<i>Walls, Above-Grade</i>						
Mass	U-0.071	R-15.2 c.i.	U-0.052	R-25.0 c.i.	U-0.104	R-9.5 c.i.
Metal Building	U-0.057	R-13.0 + R-13.0 R-19.0 + R-5.6 c.i.	U-0.057	R-13.0 + R-13.0 R-19.0 + R-5.6 c.i.	U-0.113	R-13.0
Steel-Framed	U-0.064	R-13.0 + R-7.5 c.i.	U-0.037	R-13.0 + R-18.8 c.i.	U-0.084	R-13.0 + R-3.8 c.i.
Wood-Framed and Other	U-0.036	R-13.0 + R-15.6 c.i.	U-0.036	R-13.0 + R-15.6 c.i.	U-0.089	R-13.0
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.119	R-7.5 c.i.	C-0.075	R-12.5 c.i.	C-1.140	NR
<i>Floors</i>						
Mass	U-0.057	R-14.6 c.i.	U-0.051	R-16.7 c.i.	U-0.087	R-8.3 c.i.
Steel-Joist	U-0.032	R-38.0	U-0.032	R-38.0	U-0.052	R-19.0
Wood-Framed and Other	U-0.033	R-30.0	U-0.033	R-30.0	U-0.033	R-30.0
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.520	R-15 for 24 in.	F-0.510	R-20 for 24 in.	F-0.730	NR
Heated	F-0.688	R-20 for 48 in.	F-0.688	R-20 for 48 in.	F-0.900	R-10.0 for 24 in.
<i>Opaque Doors</i>						
Swinging	U-0.500		U-0.500		U-0.700	
Nonswinging	U-0.500		U-0.500		U-0.500	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^{bc}	U-0.35		U-0.35		U-0.65	
Metal framing (curtainwall/storefront) ^{ed}	U-0.40	SHGC-0.45 all	U-0.40	SHGC-NR all	U-0.60	SHGC-NR all
Metal framing (entrance door) ^{ed}	U-0.80		U-0.80		U-0.90	
Metal framing (all other) ^{ed}	U-0.45		U-0.45		U-0.65	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -0.98	SHGC _{all} -NR	U _{all} -0.98	SHGC _{all} -NR	U _{all} -1.30	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.98	SHGC _{all} -NR	U _{all} -0.98	SHGC _{all} -NR	U _{all} -1.30	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -0.61	SHGC _{all} -NR	U _{all} -0.61	SHGC _{all} -NR	U _{all} -1.10	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.61	SHGC _{all} -NR	U _{all} -0.61	SHGC _{all} -NR	U _{all} -1.10	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -0.58	SHGC _{all} -NR	U _{all} -0.58	SHGC _{all} -NR	U _{all} -0.81	SHGC _{all} -NR
2.1%–5.0%	U _{all} -0.58	SHGC _{all} -NR	U _{all} -0.58	SHGC _{all} -NR	U _{all} -0.81	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required; otherwise use the U-factor compliance method. See Table A2.3.

^{ab}Exception to Section A3.1.3.1 applies.

^{bc}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{ed}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

Modify Section 5 as follows (SI units):

TABLE 5.5-1 Building Envelope Requirements for Climate Zone 1 (A, B)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.360	R-2.6 c.i.	U-0.273	R-3.5 c.i.	U-1.240	R-0.7 ci
Metal Building ^a	U-0.369	R-3.3	U-0.369	R-3.3	U-7.268 U-0.947	NR R-1.1
Attic and Other	U-0.192	R-5.3	U-0.153	R-6.7	U-0.459	R-2.3
<i>Walls, Above-Grade</i>						
Mass	U-3.293	NR	U-0.857 ^{ab}	R-1.0 c.i. ^{ab}	U-3.293	NR
Metal Building	U-0.642 U-0.527	R-2.3 R-2.8	U-0.642 U-0.527	R-2.3 R-2.8	U-6.700 U-0.642	NR R-2.3
Steel-Framed	U-0.705	R-2.3	U-0.705	R-2.3	U-1.998	NR
Wood-Framed and Other	U-0.504	R-2.3	U-0.504	R-2.3	U-1.660	NR
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-6.473	NR	C-6.473	NR	C-6.473	NR
<i>Floors</i>						
Mass	U-1.825	NR	U-1.825	NR	U-1.825	NR
Steel-Joist	U-1.986	NR	U-1.986	NR	U-1.986	NR
Wood-Framed and Other	U-1.599	NR	U-1.599	NR	U-1.599	NR
<i>Slab-On-Grade Floors</i>						
Unheated	F-1.264	NR	F-1.264	NR	F-1.264	NR
Heated	U-1.766	R-1.3 for 300 mm	F-1.766	R-1.3 for 300 mm	F-1.766	R-1.3 for 300 mm
<i>Opaque Doors</i>						
Swinging	U-3.975		U-3.975		U-3.975	
Nonswinging	U-8.233		U-8.233		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-6.81		U-6.81		U-6.81	
Metal framing (curtainwall/storefront) ^c	U-6.81	SHGC-0.25 all	U-6.81	SHGC-0.25 all	U-6.81	SHGC-NR all
Metal framing (entrance door) ^c	U-6.81		U-6.81		U-6.81	
Metal framing (all other) ^c	U-6.81		U-6.81		U-6.81	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -11.24	SHGC _{all} -0.36	U _{all} -11.24	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -11.24	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -0.16	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -10.79	SHGC _{all} -0.34	U _{all} -10.79	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -10.79	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -7.72	SHGC _{all} -0.36	U _{all} -7.72	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -7.72	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^{ab}Exception to Section A3.1.3.1 applies.

^{bc}Nonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^{cd}Metal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-2 Building Envelope Requirements for Climate Zone 2 (A, B)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-1.240	R-0.7 c.i.
Metal Building ^a	U-0.369 U-0.312	R-3.3 R-2.3 + R-2.3	U-0.369 U-0.312	R-3.3 R-2.3 + R-2.3	U-0.948 U-0.551	R-1.1 R-1.8
Attic and Other	U-0.153	R-6.7	U-0.153	R-6.7	U-0.459	R-2.3
<i>Walls, Above-Grade</i>						
Mass	U-0.857 ^a	R-1.0 c.i. ^a	U-0.701 ^b	R-1.3 c.i. ^b	U-3.293	NR
Metal Building	U-0.642 U-0.528	R-2.3 R-2.8	U-0.642 U-0.528	R-2.3 R-2.8	U-0.642	R-2.3
Steel-Framed	U-0.705	R-2.3	U-0.365	R-2.3 + R-1.3 c.i.	U-0.705	R-2.3
Wood-Framed and Other	U-0.504	R-2.3	U-0.504	R-2.3	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-6.473	NR	C-6.473	NR	C-6.473	NR
<i>Floors</i>						
Mass	U-0.606	R-1.1 c.i.	U-0.496	R-1.5 c.i.	U-1.825	NR
Steel-Joist	U-0.296	R-3.3	U-0.296	R-3.3	U-0.390	R-2.3
Wood-Framed and Other	U-0.288	R-3.3	U-0.188	R-5.3	U-0.376	R-2.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-1.264	NR	F-1.264	NR	F-1.264	NR
Heated	F-1.766	R-1.3 for 300 mm	F-1.766	R-1.3 for 300 mm	F-1.766	R-1.3 for 300 mm
<i>Opaque Doors</i>						
Swinging	U-3.975		U-3.975		U-3.975	
Nonswinging	U-8.233		U-2.839		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-4.26		U-4.26		U-6.81	
Metal framing (curtainwall/storefront) ^c	U-3.97	SHGC-0.25 all	U-3.97	SHGC-0.25 all	U-6.81	SHGC-NR all
Metal framing (entrance door) ^c	U-6.25		U-6.25		U-6.81	
Metal framing (all other) ^c	U-4.26		U-4.26		U-6.81	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -11.24	SHGC _{all} -0.36	U _{all} -11.24	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -11.24	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -10.79	SHGC _{all} -0.39	U _{all} -10.79	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -10.79	SHGC _{all} -0.34	U _{all} -10.79	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -7.72	SHGC _{all} -0.36	U _{all} -7.72	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -7.72	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-3 Building Envelope Requirements for Climate Zone 3 (A, B, C)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-0.982	R-0.9 c.i.
Metal Building ^a	U-0.369 U-0.312	R-3.3 R-2.3 + R-2.3	U-0.369 U-0.312	R-3.3 R-2.3 + R-2.3	U-0.551	R-1.8
Attic and Other	U-0.153	R-6.7	U-0.153	R-6.7	U-0.300	R-3.3
<i>Walls, Above-Grade</i>						
Mass	U-0.701	R-1.3 c.i.	U-0.592	R-1.7 c.i.	U-3.293	NR
Metal Building	U-0.642 U-0.477	R-2.3 R-3.3	U-0.642 U-0.476	R-2.3 R-3.3	U-1.045 U-0.642	R-1.1 R-2.3
Steel-Framed	U-0.479	R-2.3 + R-0.7 c.i.	U-0.365	R-2.3 + R-1.3 c.i.	U-0.705	R-2.3
Wood-Framed and Other	U-0.504	R-2.3	U-0.504	R-2.3	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-6.473	NR	C-6.473	NR	C-6.473	NR
<i>Floors</i>						
Mass	U-0.606	R-1.1	U-0.496	R-1.5	U-1.825	NR
Steel-Joist	U-0.296	R-3.3	U-0.296	R-3.3	U-0.390	R-2.3
Wood-Framed and Other	U-0.288	R-3.3	U-0.188	R-5.3	U-0.376	R-2.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-1.264	NR	F-1.264	NR	F-1.264	NR
Heated	F-1.558	R-1.8 for 600 mm	F-1.558	R-1.8 for 600 mm	F-1.766	R-1.3 for 300 mm
<i>Opaque Doors</i>						
Swinging	U-3.975		U-3.975		U-3.975	
Nonswinging	U-8.233		U-2.839		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-3.69		U-3.69		U-6.81	
Metal framing (curtainwall/storefront) ^c	U-3.41	SHGC-0.25 all	U-3.41	SHGC-0.25 all	U-6.81	SHGC-NR all
Metal framing (entrance door) ^c	U-5.11		U-5.11		U-6.81	
Metal framing (all other) ^c	U-3.69		U-3.69		U-6.81	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -6.64	SHGC _{all} -0.39	U _{all} -6.64	SHGC _{all} -0.36	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -6.64	SHGC _{all} -0.19	U _{all} -6.64	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -7.38	SHGC _{all} -0.65	U _{all} -7.38	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -7.38	SHGC _{all} -0.34	U _{all} -7.38	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -3.92	SHGC _{all} -0.39	U _{all} -3.92	SHGC _{all} -0.36	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.92	SHGC _{all} -0.19	U _{all} -3.92	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-4 Building Envelope Requirements for Climate Zone 4 (A, B, C)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-0.982	R-0.9 c.i.
Metal Building ^a	U-0.369 <u>U-0.312</u>	R-3.3 <u>R-2.3 + R-2.3</u>	U-0.369 <u>U-0.312</u>	R-3.3 <u>R-2.3 + R-2.3</u>	U-0.551	R-1.8
Attic and Other	U-0.0.153	R-6.7	U-0.153	R-6.7	U-0.300	R-3.3
<i>Walls, Above-Grade</i>						
Mass	U-0.592	R-1.7 c.i.	U-0.513	R-2.0 c.i.	U-3.293	NR
Metal Building	U-0.642 <u>U-0.477</u>	R-2.3 <u>R-3.3</u>	U-0.642 <u>U-0.476</u>	R-2.3 <u>R-3.3</u>	U-0.642	R-2.3
Steel-Framed	U-0.365	R-2.3 + R-1.3	U-0.365	R-2.3 + R-1.3 c.i.	U-0.705	R-2.3
Wood-Framed and Other	U-0.504	R-2.3	U-0.365	R-2.3 + R-0.7 c.i.	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-6.473	NR	C-0.678	R-1.3 c.i.	C-6.473	NR
<i>Floors</i>						
Mass	U-0.496	R-1.5 c.i.	U-0.420	R-1.8 c.i.	U-0.780	R-0.7 c.i.
Steel-Joist	U-0.214	R-5.3	U-0.214	R-5.3	U-0.390	R-2.3
Wood-Framed and Other	U-0.188	R-5.3	U-0.188	R-5.3	U-0.376	R-2.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-1.264	NR	F-0.935	R-1.8 for 600 mm	F-1.264	NR
Heated	F-1.489	R-2.6 for 600 mm	F-1.489	R-2.6 for 600 mm	F-1.766	R-1.3 for 300 mm
<i>Opaque Doors</i>						
Swinging	U-3.975		U-3.975		U-3.975	
Nonswinging	U-2.839		U-2.839		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-2.27		U-2.27		U-6.81	
Metal framing (curtainwall/storefront) ^c	U-2.84	SHGC-0.40 all	U-2.84	SHGC-0.40 all	U-6.81	SHGC-NR all
Metal framing (entrance door) ^c	U-4.83		U-4.83		U-6.81	
Metal framing (all other) ^c	U-3.12		U-3.12		U-6.81	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -6.64	SHGC _{all} -0.49	U _{all} -5.56	SHGC _{all} -0.36	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -6.64	SHGC _{all} -0.39	U _{all} -5.56	SHGC _{all} -0.19	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -7.38	SHGC _{all} -0.65	U _{all} -7.38	SHGC _{all} -0.62	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -7.38	SHGC _{all} -0.34	U _{all} -7.38	SHGC _{all} -0.27	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -3.92	SHGC _{all} -0.49	U _{all} -3.29	SHGC _{all} -0.36	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.92	SHGC _{all} -0.39	U _{all} -3.29	SHGC _{all} -0.19	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-5 Building Envelope Requirements for Climate Zone 5 (A, B, C)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-0.677	R-1.3 c.i.
Metal Building ^a	U-0.369 U-0.312	R-3.3 R-2.3 + R-2.3	U-0.369 U-0.312	R-3.3 R-2.3 + R-2.3	U-0.551 U-0.471	R-1.8 R-2.3
Attic and Other	U-0.153	R-6.7	U-0.153	R-6.7	U-0.300	R-3.3
<i>Walls, Above-Grade</i>						
Mass	U-0.513	R-2.0 c.i.	U-0.453	R-2.3 c.i.	U-0.857 ^a	R-1.0 c.i. ^a
Metal Building	U-0.642 U-0.391	R-2.3 R-2.3 + R-1.0 c.i.	U-0.324 U-0.391	R-2.3 + R-2.3 R-2.3 + R-1.0 c.i.	U-0.698 U-0.642	R-1.9 R-2.3
Steel-Framed	U-0.365	R-2.3 + R-1.3 c.i.	U-0.365	R-2.3 + R-1.3 c.i.	U-0.705	R-2.3
Wood-Framed and Other	U-0.365	R-2.3 + R-0.7 c.i.	U-0.291	R-2.3 + R-1.3 c.i.	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.678	R-1.3 c.i.	C-0.678	R-1.3 c.i.	C-6.473	NR
<i>Floors</i>						
Mass	U-0.420	R-1.8 c.i.	U-0.363	R-2.2 c.i.	U-0.780	R-0.7 c.i.
Steel-Joist	U-0.214	R-5.3	U-0.214	R-5.3	U-0.296	R-3.3
Wood-Framed and Other	U-0.188	R-5.3	U-0.188	R-5.3	U-0.288	R-3.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-1.264	NR	F-0.935	R-1.8 for 600 mm	F-1.264	NR
Heated	F-1.489	R-2.6 for 600 mm	F-1.489	R-2.6 for 600 mm	F-1.766	R-1.3 for 300 mm
<i>Opaque Doors</i>						
Swinging	U-3.975		U-2.839		U-3.975	
Nonswinging	U-2.839		U-2.839		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, % of Wall</i>						
Nonmetal framing (all) ^b	U-1.99		U-1.99		U-6.81	
Metal framing (curtainwall/storefront) ^c	U-2.56	SHGC-0.40 all	U-2.56	SHGC-0.40 all	U-6.81	SHGC-NR all
Metal framing (entrance door) ^c	U-4.54		U-4.54		U-6.81	
Metal framing (all other) ^c	U-3.12		U-3.12		U-6.81	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -6.64	SHGC _{all} -0.49	U _{all} -6.64	SHGC _{all} -0.49	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -6.64	SHGC _{all} -0.39	U _{all} -6.64	SHGC _{all} -0.39	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -6.25	SHGC _{all} -0.77	U _{all} -6.25	SHGC _{all} -0.77	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -6.25	SHGC _{all} -0.62	U _{all} -6.25	SHGC _{all} -0.62	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -3.92	SHGC _{all} -0.49	U _{all} -3.92	SHGC _{all} -0.49	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.92	SHGC _{all} -0.39	U _{all} -3.92	SHGC _{all} -0.39	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-6 Building Envelope Requirements for Climate Zone 6 (A, B)*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-0.527	R-1.8 c.i.
Metal Building ^a	U-0.369 U-0.278	R-3.3 R-2.3 + R-3.3	U-0.369 U-0.278	R-3.3 R-2.3 + R-3.3	U-0.551 U-0.409	R-1.8 R-2.8
Attic and Other	U-0.153	R-6.7	U-0.153	R-6.7	U-0.192	R-5.3
<i>Walls, Above-Grade</i>						
Mass	U-0.453	R-2.3 c.i.	U-0.404	R-2.7 c.i.	U-0.857 ^a	R-1.0 c.i. ^a
Metal Building	U-0.642 U-0.392	R-2.3 R-2.3 + R-1.0 c.i.	U-0.324 U-0.392	R-2.3 + R-2.3 R-2.3 + R-1.0 c.i.	U-0.642	R-2.3
Steel-Framed	U-0.365	R-2.3 + R-1.3 c.i.	U-0.365	R-2.3 + R-1.3 c.i.	U-0.705	R-2.3
Wood-Framed and Other	U-0.291	R-2.3 + R-1.3 c.i.	U-0.291	R-2.3 + R-1.3 c.i.	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.678	R-1.3 c.i.	C-0.678	R-1.3c.i.	C-6.473	NR
<i>Floors</i>						
Mass	U-0.363	R-2.2 c.i.	U-0.321	R-2.6 c.i.	U-0.780	R-0.7 c.i.
Steel-Joist	U-0.214	R-5.3	U-0.183	R-6.7	U-0.296	R-3.3
Wood-Framed and Other	U-0.188	R-5.3	U-0.188	R-5.3	U-0.288	R-3.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.935	R-1.8 for 600 mm	F-0.900	R-2.6 for 600 mm	F-1.264	NR
Heated	F-1.489	R-2.6 for 600 mm	F-1.191	R-3.5 for 1200 mm	F-1.766	R-1.3 for 300 mm
<i>Opaque Doors</i>						
Swinging	U-3.975		U-2.839		U-3.975	
Nonswinging	U-2.839		U-2.839		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-1.99		U-1.99		U-3.69	
Metal framing (curtainwall/storefront) ^c	U-2.56	SHGC-0.40 all	U-2.56	SHGC-0.40 all	U-3.41	SHGC-NR all
Metal framing (entrance door) ^c	U-4.54		U-4.54		U-5.11	
Metal framing (all other) ^c	U-3.12		U-3.12		U-3.69	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -6.64	SHGC _{all} -0.49	U _{all} -5.56	SHGC _{all} -0.46	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -6.64	SHGC _{all} -0.49	U _{all} -5.56	SHGC _{all} -0.36	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -4.94	SHGC _{all} -0.71	U _{all} -4.20	SHGC _{all} -0.65	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -4.94	SHGC _{all} -0.58	U _{all} -4.20	SHGC _{all} -0.55	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -3.92	SHGC _{all} -0.49	U _{all} -3.29	SHGC _{all} -0.49	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.92	SHGC _{all} -0.49	U _{all} -3.29	SHGC _{all} -0.39	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-7 Building Envelope Requirements for Climate Zone 7*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-0.527	R-1.8 c.i.
Metal Building ^a	U-0.369 U-0.278	R-3.3 R-2.3 + R-3.3	U-0.369 U-0.278	R-3.3 R-2.3 + R-3.3	U-0.551 U-0.409	R-1.8 R-2.8
Attic and Other	U-0.153	R-6.7	U-0.153	R-6.7	U-0.192	R-5.3
<i>Walls, Above-Grade</i>						
Mass	U-0.404	R-2.7 c.i.	U-0.404	R-2.7 c.i.	U-0.701	R-1.3 c.i.
Metal Building	U-0.324	R-2.3 + R-2.3 R-3.3 + R-1.0 c.i.	U-0.324	R-2.3 + R-2.3 R-3.3 + R-1.0 c.i.	U-0.642	R-2.3
Steel-Framed	U-0.365	R-2.3 + R-1.3 c.i.	U-0.240	R-2.3 + R-2.7 c.i.	U-0.705	R-2.3
Wood-Framed and Other	U-0.291	R-2.3 + R-1.3 c.i.	U-0.291	R-2.3 + R-1.3 c.i.	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.678	R-1.3 c.i.	C-0.522	R-1.8 c.i.	C-6.473	NR
<i>Floors</i>						
Mass	U-0.363	R-2.2 c.i.	U-0.287	R-2.9 c.i.	U-0.606	R-1.1 c.i.
Steel-Joist	U-0.214	R-5.3	U-0.183	R-6.7	U-0.296	R-3.3
Wood-Framed and Other	U-0.188	R-5.3	U-0.188	R-5.3	U-0.288	R-3.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.900	R-2.6 for 600 mm	F-0.900	R-2.6 for 600 mm	F-1.264	NR
Heated	F-1.459	R-3.5 for 600 mm	F-1.191	R-3.5 for 1200	F-1.558	R-1.8 for 600 mm
<i>Opaque Doors</i>						
Swinging	U-2.839		U-2.839		U-3.975	
Nonswinging	U-2.839		U-2.839		U-8.233	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-1.99		U-1.99		U-3.69	
Metal framing (curtainwall/storefront) ^c	U-2.27	SHGC-0.45 all	U-2.27	SHGC-NR all	U-3.41	SHGC-NR all
Metal framing (entrance door) ^c	U-4.54		U-4.54		U-5.11	
Metal framing (all other) ^c	U-2.56		U-2.56		U-3.69	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -6.64	SHGC _{all} -0.68	U _{all} -6.64	SHGC _{all} -0.64	U _{all} -11.24	SHGC _{all} -NR
2.1%–5.0%	U _{all} -6.64	SHGC _{all} -0.64	U _{all} -6.64	SHGC _{all} -0.64	U _{all} -11.24	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -4.94	SHGC _{all} -0.77	U _{all} -3.46	SHGC _{all} -0.77	U _{all} -10.79	SHGC _{all} -NR
2.1%–5.0%	U _{all} -4.94	SHGC _{all} -0.71	U _{all} -3.46	SHGC _{all} -0.77	U _{all} -10.79	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -3.92	SHGC _{all} -0.68	U _{all} -3.92	SHGC _{all} -0.64	U _{all} -7.72	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.92	SHGC _{all} -0.64	U _{all} -3.92	SHGC _{all} -0.64	U _{all} -7.72	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

TABLE 5.5-8 Building Envelope Requirements for Climate Zone 8*

Opaque Elements	Nonresidential		Residential		Semiheated	
	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value	Assembly Maximum	Insulation Min. R-Value
<i>Roofs</i>						
Insulation Entirely above Deck	U-0.273	R-3.5 c.i.	U-0.273	R-3.5 c.i.	U-0.360	R-2.6 c.i.
Metal Building ^a	U-0.278 U-0.199	R-2.3 + R-3.3 R-1.9 + R-3.3 ls	U-0.278 U-0.199	R-2.3 + R-3.3 R-1.9 + R-3.3 ls	U-0.409 U-0.369	R-2.8 R-3.3
Attic and Other	U-0.119	R-8.6	U-0.119	R-8.6	U-0.192	R-5.3
<i>Walls, Above-Grade</i>						
Mass	U-0.404	R-2.7 c.i.	U-0.295	R-4.4 c.i.	U-0.592	R-1.7 c.i.
Metal Building	U-0.324	R-2.3 + R-2.3 R-3.3 + R-1.0 c.i.	U-0.324	R-2.3 + R-2.3 R-3.3 + R-1.0 c.i.	U-0.642	R-2.3
Steel-Framed	U-0.365	R-2.3 + R-1.3 c.i.	U-0.212	R-2.3 + R-3.3 c.i.	U-0.479	R-2.3 + R-0.7 c.i.
Wood-Framed and Other	U-0.203	R-2.3 + R-2.7 c.i.	U-0.203	R-2.3 + R-2.7 c.i.	U-0.504	R-2.3
<i>Walls, Below-Grade</i>						
Below-Grade Wall	C-0.678	R-1.3 c.i.	C-0.425	R-2.2 c.i.	C-6.473	NR
<i>Floors</i>						
Mass	U-0.321	R-2.6 c.i.	U-0.287	R-2.9 c.i.	U-0.496	R-1.5 c.i.
Steel-Joist	U-0.183	R-6.7	U-0.183	R-6.7	U-0.296	R-3.3
Wood-Framed and Other	U-0.188	R-5.3	U-0.188	R-5.3	U-0.188	R-5.3
<i>Slab-On-Grade Floors</i>						
Unheated	F-0.900	R-2.6 for 600 mm	F-0.883	R-3.5 for 600 mm	F-1.264	NR
Heated	F-1.191	R-3.5 for 1200 mm	F-1.191	R-3.5 for 1200 mm	F-1.558	R-1.8 for 600 mm
<i>Opaque Doors</i>						
Swinging	U-2.839		U-2.839		U-3.975	
Nonswinging	U-2.839		U-2.839		U-2.839	
Fenestration	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC	Assembly Max. U	Assembly Max. SHGC
<i>Vertical Glazing, 0%–40% of Wall</i>						
Nonmetal framing (all) ^b	U-1.99		U-1.99		U-3.69	
Metal framing (curtainwall/storefront) ^c	U-2.27	SHGC-0.45 all	U-2.27	SHGC-NR all	U-3.41	SHGC-NR all
Metal framing (entrance door) ^c	U-4.54		U-4.54		U-5.11	
Metal framing (all other) ^c	U-2.56		U-2.56		U-3.69	
<i>Skylight with Curb, Glass, % of Roof</i>						
0%–2.0%	U _{all} -5.56	SHGC _{all} -NR	U _{all} -5.56	SHGC _{all} -NR	U _{all} -7.38	SHGC _{all} -NR
2.1%–5.0%	U _{all} -5.56	SHGC _{all} -NR	U _{all} -5.56	SHGC _{all} -NR	U _{all} -7.38	SHGC _{all} -NR
<i>Skylight with Curb, Plastic, % of Roof</i>						
0%–2.0%	U _{all} -3.46	SHGC _{all} -NR	U _{all} -3.46	SHGC _{all} -NR	U _{all} -6.25	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.46	SHGC _{all} -NR	U _{all} -3.46	SHGC _{all} -NR	U _{all} -6.25	SHGC _{all} -NR
<i>Skylight without Curb, All, % of Roof</i>						
0%–2.0%	U _{all} -3.29	SHGC _{all} -NR	U _{all} -3.29	SHGC _{all} -NR	U _{all} -4.60	SHGC _{all} -NR
2.1%–5.0%	U _{all} -3.29	SHGC _{all} -NR	U _{all} -3.29	SHGC _{all} -NR	U _{all} -4.60	SHGC _{all} -NR

*The following definitions apply: c.i. = continuous insulation (see Section 3.2), NR = no (insulation) requirement.

^aWhen using R-value compliance method, a thermal spacer block is required, otherwise use the U-factor compliance method. See Table A2.3.

^bException to Section A3.1.3.1 applies.

^cNonmetal framing includes framing materials other than metal with or without metal reinforcing or cladding.

^dMetal framing includes metal framing with or without thermal break. The “all other” subcategory includes operable windows, fixed windows, and non-entrance doors.

Modify Appendix A as follows (I-P units):

A2.3 Metal Building Roofs

A2.3.1 General. For the purpose of A1.2, the base assembly is a roof with thermal spacer blocks where the insulation is draped over the steel structure (purlins), spaced nominally 5 ft on center and then compressed when the metal roof panels are attached to the steel structure (purlins). ~~Additional assemblies include continuous insulation, uncompressed and uninterrupted by framing.~~

A2.3.2 Rated R-Value of insulation

A2.3.2.1 The first *rated R-value of insulation* is for insulation draped over purlins and then compressed when the metal roof panels are attached, or for insulation hung between the purlins. A minimum R-3.5 ~~in~~ thermal spacer block between the purlins and the metal roof panels is required when specified in Table A2.3.

A2.3.2.2 For double-layer installations, the second *rated R-value of insulation* is for insulation installed parallel to the purlins.

A2.3.2.3 For continuous insulation (e.g., insulation boards or blankets), it is assumed that the insulation is installed below the purlins and is uninterrupted by framing

members. Insulation exposed to the *conditioned space* or *semiheated space* shall have a facing, and all insulation seams shall be continuously sealed to provide a continuous air barrier.

A2.3.2.4 Liner System (Ls). A continuous vapor barrier liner is installed below the purlins and uninterrupted by framing members. Uncompressed, unfaced insulation rests on top of the liner between the purlins. For multilayer installations, the first rated R-Value of insulation is for unfaced insulation draped over purlins and then compressed when the metal roof panels are attached. A minimum R-3.5 thermal spacer block between the purlins and the metal roof panels is required when specified in Table A2.3.

A2.3.3 U-Factor. *U-factors* for *metal building roofs* shall be taken from Table A2.3 It is not acceptable to use these *U-factors* if additional insulated sheathing is not continuous.

...

...

Exception to A3.1.3.1: For *mass walls*, where the requirement in Tables 5.5-1 through 5.5-8 is for a maximum assembly U-0.151 followed by footnote “~~ab~~,” ...

The remainder of Appendix A is unchanged.

Modify Tables A2.3 and A3.2 as follows (I-P units):

TABLE A2.3 Assembly U-Factors for Metal Building Roofs

Insulation System	Rated R-Value of Insulation	Total Rated R-Value of Insulation	Overall U-Factor for Entire Base Roof Assembly	Overall U-Factor for Assembly of Base Roof Plus Continuous Insulation (Uninterrupted by Framing)					
				Rated R-Value of Continuous Insulation					
				R-5.6	R-11.2	R-16.8	R-22.4	R-28.0	R-33.6
Standing Seam Roofs with Thermal Spacer Blocks									
Single Layer	None	0	U-1.280	<u>0.162</u> <u>0.157</u>	<u>0.087</u> <u>0.083</u>	<u>0.059</u> <u>0.057</u>	<u>0.045</u> <u>0.043</u>	<u>0.036</u> <u>0.035</u>	<u>0.030</u> <u>0.029</u>
	R-6	6	U-0.167	0.086	0.058	0.044	0.035	0.029	0.025
	R-10	10	U-0.097	0.063	0.046	0.037	0.031	0.026	0.023
	R-11	11	U-0.092	0.061	0.045	0.036	0.030	0.026	0.022
	R-13	13	U-0.083	0.057	0.043	0.035	0.029	0.025	0.022
	R-16	16	U-0.072	0.051	0.040	0.033	0.028	0.024	0.021
	R-19	19	U-0.065	0.048	0.038	0.031	0.026	0.023	0.020
Double Layer	R-10 + R-10	20	U-0.063	0.047	0.037	0.031	0.026	0.023	0.020
	R-10 + R-11	21	U-0.061	0.045	0.036	0.030	0.026	0.023	0.020
	R-11 + R-11	22	U-0.060	0.045	0.036	0.030	0.026	0.022	0.020
	R-10 + R-13	23	U-0.058	0.044	0.035	0.029	0.025	0.022	0.020
	R-11 + R-13	24	U-0.057	0.043	0.035	0.029	0.025	0.022	0.020
	R-13 + R-13	26	U-0.055	0.042	0.034	0.029	0.025	0.022	0.019
	R-10 + R-19	29	U-0.052	0.040	0.033	0.028	0.024	0.021	0.019
	R-11 + R-19	30	U-0.051	0.040	0.032	0.027	0.024	0.021	0.019
	R-13 + R-19	32	U-0.049	0.038	0.032	0.027	0.023	0.021	0.019
	R-16 + R-19	35	U-0.047	0.037	0.031	0.026	0.023	0.020	0.018
Liner System	R-11 + R-19	30	U-0.035						
	R-11 + R-25	36	U-0.031						
	R-11 + R-30	41	U-0.029						
	R-11 + R-11 + R-25	47	U-0.026						
Standing Seam Roofs without Thermal Spacer Blocks									
Liner System	R-11 + R-19	30	U-0.040		<u>0.028</u>	<u>0.024</u>	<u>0.021</u>	<u>0.020</u>	<u>0.017</u>
Filled Cavity with Thermal Spacer Blocks									
	R-19 + R-10	29	U-0.041	0.033	0.028	0.024	0.021	0.020 <u>0.019</u>	0.017
(Multiple R-values are listed in order from inside to outside.)									
Thru-Fastened without Thermal Spacer Blocks									
	R-10	10	U-0.153						
	R-11	11	U-0.139						
	R-13	13	U-0.130						
	R-16	16	U-0.106						
	R-19	19	U-0.098						
Liner System	R-11 + R-19	30	U-0.044						

TABLE A3.2 Assembly U-Factors for Metal Building Walls

Insulation System	Rated R-Value of Insulation	Total Rated R-Value of Insulation	Overall U-Factor for Entire Base Wall Assembly	Overall U-Factor for Assembly of Base Wall Plus Continuous Insulation (Uninterrupted by Framing)					
				Rated R-Value of Continuous Insulation					
				R-5.6	R-11.2	R-16.8	R-22.4	R-28.0	R-33.6
Single Layer of Mineral Fiber									
	None	0	1.180	0.161	0.086	0.059	0.045	0.036	0.030
	R-6	6	0.184	0.091	0.060	0.045	0.036	0.030	0.026
	R-10	10	0.134	0.077	0.054	0.051	0.033	0.028	0.024
	R-11	11	0.123	0.073	0.052	0.040	0.033	0.028	0.024
	R-13	13	0.113	0.069	0.050	0.039	0.032	0.027	0.024
	<u>R-16</u>	<u>16</u>	<u>0.093</u>	<u>0.061</u>	<u>0.046</u>	<u>0.036</u>	<u>0.030</u>	<u>0.026</u>	<u>0.023</u>
	<u>R-19</u>	<u>19</u>	<u>0.084</u>	<u>0.057</u>	<u>0.043</u>	<u>0.035</u>	<u>0.029</u>	<u>0.025</u>	<u>0.022</u>
Double Layer of Mineral Fiber									
(Second layer inside of girts)									
(Multiple layers are listed in order from inside to outside)									
	R-6 + R-13	19	0.070	N/A	N/A	N/A	N/A	N/A	N/A
	R-10 + R-13	23	0.061	N/A	N/A	N/A	N/A	N/A	N/A
	R-13 + R-13	26	0.057	N/A	N/A	N/A	N/A	N/A	N/A
	R-19 + R-13	32	0.048	N/A	N/A	N/A	N/A	N/A	N/A

Modify Appendix A as follows (SI units):

A2.3 Metal Building Roofs

A2.3.1 General. For the purpose of A1.2, the base assembly is a roof with thermal spacer blocks where the insulation is draped over the steel structure (purlins), spaced nominally 1.52 m on center, and then compressed when the metal roof panels are attached to the steel structure (purlins). ~~Additional assemblies include continuous insulation, uncompressed and uninterrupted by framing.~~

A2.3.2 Rated R-Value of insulation

A2.3.2.1 The first rated R-value of insulation is for insulation draped over purlins and then compressed when the metal roof panels are attached, or for insulation hung between the purlins. A minimum R-0.61 in. thermal spacer block between the purlins and the metal roof panels is required when specified in Table A2.3.

A2.3.2.2 For double-layer installations, the second rated R-value of insulation is for insulation installed parallel to the purlins.

A2.3.2.3 For continuous insulation (e.g., insulation boards or blankets), it is assumed that the insulation is installed below the purlins and is uninterrupted by framing

members. Insulation exposed to the *conditioned space* or *semiheated space* shall have a facing, and all insulation seams shall be continuously sealed to provide a continuous air barrier.

A2.3.2.4 Liner System (Ls). A continuous vapor barrier liner is installed below the purlins and uninterrupted by framing members. Uncompressed, unfaced insulation rests on top of the liner between the purlins. For multilayer installations, the first rated R-value of insulation is for unfaced insulation draped over purlins and then compressed when the metal roof panels are attached. A minimum R-0.6 thermal spacer block between the purlins and the metal roof panels is required when specified in Table A2.3.

A2.3.3 U-Factor. *U-factors for metal building roofs* shall be taken from Table A2.3 It is not acceptable to use these *U-factors* if additional insulated sheathing is not continuous.

...
...

Exception to A3.1.3.1:For *mass walls*, where the requirement in Tables 5.5-1 through 5.5-8 is for a maximum assembly U-0.857 followed by footnote “**ab**,” ...

The remainder of Appendix A is unchanged.

Modify Tables A2.3 and A3.2 as follows (SI units):

TABLE A2.3 Assembly U-Factors for Metal Building Roofs

Insulation System	Rated R-Value of Insulation	Total Rated R-Value of Insulation	Overall U-Factor for Entire Base Roof Assembly	Overall U-Factor for Assembly of Base Roof Plus Continuous Insulation (Uninterrupted by Framing)					
				Rated R-Value of Continuous Insulation					
				R-1.0	R-2.0	R-3.0	R-4.0	R-4.9	R-5.9
Standing Seam Roofs with Thermal Spacer Blocks									
Single Layer	None	0	U-7.258	<u>0.919</u> <u>0.891</u>	<u>0.493</u> <u>0.471</u>	<u>0.335</u> <u>0.324</u>	<u>0.255</u> <u>0.244</u>	<u>0.204</u> <u>0.199</u>	<u>1.070</u> <u>0.165</u>
	R-1.1	1.1	U-0.947	0.489	0.330	0.249	0.200	0.167	0.143
	R-1.8	1.8	U-0.550	0.356	0.264	0.209	0.173	0.148	0.129
	R-1.9	1.9	U-0.522	0.344	0.257	0.205	0.170	0.146	0.128
	R-2.3	2.3	U-0.471	0.321	0.244	0.197	0.165	0.142	0.124
	R-2.8	2.8	U-0.408	0.291	0.226	0.185	0.156	0.135	0.119
	R-3.3	3.3	U-0.369	0.270	0.213	0.176	0.150	0.131	0.116
Double Layer	R-1.8 + R-1.8	3.5	U-0.357	0.264	0.209	0.174	0.148	0.129	0.115
	R-1.8 + R-1.9	3.7	U-0.346	0.258	0.205	0.171	0.146	0.128	0.113
	R-1.9 + R-1.9	3.9	U-0.340	0.255	0.203	0.169	0.145	0.127	0.113
	R-1.8 + R-2.3	4.1	U-0.329	0.248	0.199	0.167	0.143	0.125	0.112
	R-1.9 + R-2.3	4.2	U-0.323	0.245	0.197	0.165	0.142	0.124	0.111
	R-2.3 + R-2.3	4.6	U-0.312	0.238	0.193	0.162	0.140	0.123	0.109
	R-1.8 + R-3.3	5.1	U-0.295	0.228	0.186	0.157	0.136	0.120	0.107
	R-1.9 + R-3.3	5.3	U-0.289	0.225	0.184	0.156	0.135	0.119	0.107
	R-2.3 + R-3.3	5.6	U-0.278	0.218	0.179	0.152	0.132	0.117	0.105
	R-2.8 + R-3.3	6.2	U-0.266	0.211	0.175	0.149	0.130	0.115	0.103
R-3.3 + R-3.3	6.7	U-0.261	0.207	0.172	0.147	0.128	0.114	0.102	
Liner System	<u>R-1.9 + R-3.3</u>	<u>5.3</u>	<u>0.198</u>						
	<u>R-1.9 + R-4.4</u>	<u>6.3</u>	<u>0.176</u>						
	<u>R-1.9 + R-5.3</u>	<u>7.2</u>	<u>0.165</u>						
	<u>R-1.9 + R-1.9 + R-4.4</u>	<u>8.3</u>	<u>0.148</u>						
Standing Seam Roofs without Thermal Spacer Blocks									
Liner System	<u>R-1.9 + R-3.3</u>	<u>5.3</u>	<u>0.227</u>	<u>0.185</u>	<u>0.157</u>	<u>0.136</u>	<u>0.120</u>	<u>0.107</u>	<u>0.097</u>
Filled Cavity with Thermal Spacer Blocks									
	R-3.3 + R-1.8	5.1	U-0.232	0.189	0.159	0.138	0.121	0.108	0.098
(Multiple R-values are listed in order from inside to outside.)									
Thru-Fastened Roofs without Thermal Spacer Blocks									
	R-1.8	1.8	U-0.868						
	R-1.9	1.9	U-0.788						
	R-2.3	2.3	U-0.737						
	R-2.8	2.8	U-0.660						
	R-3.3	3.3	U-0.550						
Liner System	<u>R-1.9 + R-3.3</u>	<u>5.3</u>	<u>0.249</u>						

TABLE A3.2 Assembly U-Factors for Metal Building Walls

Insulation System	Rated R-Value of Insulation	Total Rated R-Value of Insulation	Overall U-Factor for Entire Base Wall Assembly	Overall U-Factor for Assembly of Base Wall Plus Continuous Insulation (Uninterrupted by Framing)					
				Rated R-Value of Continuous Insulation					
				R-1.0	R-2.0	R-3.0	R-4.0	R-4.9	R-5.9
Single Layer of Mineral Fiber									
	None	0.0	6.69	0.91 <u>0.88</u>	0.49 <u>0.47</u>	0.33 <u>0.32</u>	0.26 <u>0.24</u>	0.20	0.17 <u>0.16</u>
	R-1.1	1.1	1.04	0.51	0.34	0.26	0.20	0.17	0.15
	R-1.8	1.8	0.76	0.43	0.30	0.23	0.19	0.16	0.14
	R-1.9	1.9	0.70	0.41	0.29	0.23	0.19	0.16	0.14
	R-2.3	2.3	0.64	0.39	0.28	0.22	0.18	0.15	0.13
	<u>R-2.8</u>	<u>2.8</u>	<u>0.53</u>	<u>0.35</u>	<u>0.26</u>	<u>0.20</u>	<u>0.17</u>	<u>0.15</u>	<u>0.13</u>
	<u>R-3.3</u>	<u>3.3</u>	<u>0.48</u>	<u>0.32</u>	<u>0.24</u>	<u>0.20</u>	<u>0.16</u>	<u>0.14</u>	<u>0.12</u>
Double Layer of Mineral Fiber									
(Second layer inside of girts)									
(Multiple layers are listed in order from inside to outside)									
	R-1.1 + R-2.3	3.4	0.40	N/A	N/A	N/A	N/A	N/A	N/A
	R-1.8 + R-2.3	4.1	0.35	N/A	N/A	N/A	N/A	N/A	N/A
	R-2.3 + R-2.3	4.6	0.32	N/A	N/A	N/A	N/A	N/A	N/A
	R-3.3 + R-2.3	5.6	0.27	N/A	N/A	N/A	N/A	N/A	N/A

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This change includes a new exception to Section 6.5.2.1 that is geared toward zones with direct digital controls (DDC). The new exception (exception b) largely addresses the apparent conflict between Standards 55, 62.1, and 90.1, and also takes advantage of the energy-saving potential of DDC controls in order to save about \$0.20/ft²/yr with a simple payback of less than two years. The apparent conflict is that the current 30% reheat maximum typically requires very high supply air temperatures (e.g., >100°F) to meet peak heating load. High supply air temperatures result in poor comfort per Standard 55 and poor ventilation effectiveness per Standard 62.1. The new exception allows reheat to increase from 30% to 50%, which means lower supply air temperatures and better comfort and ventilation effectiveness. The energy savings come from the fact that maximum airflow in deadband is being lowered from 30% to 20%. This saves fan energy and cooling energy in deadband, and also reduces the amount of time when the zone will be overcooled in deadband and forced into reheat.

This new exception will also alleviate a common problem where engineers feel compelled to violate the current 30% exception in order to provide adequate heating. In addition to poor comfort and ventilation effectiveness, high supply air temperatures also lead to short-circuiting. When hot supply air short circuits directly from the supply to the return, the space takes longer to warm up and may not warm up at all. Therefore, it is very common for designers and contractors to disregard the current 30% requirement and use 40% or 50% minimum flow setpoints to ensure adequate heating. No one likes to disregard the code, but if the choice is between code and comfort, comfort wins. The new exception allows users to achieve comfort, meet the code, and save energy at minimal cost.

Because not all zones have DDC controls and because this is a fairly significant shift in zone controls, the existing 30% exception is left in the standard. However, two clauses from the existing exception are deleted. The 0.4 cfm/ft² exception is deleted because it implies that a minimum air speed in the occupied space is required for comfort. ASHRAE Standard 55, however, indicates that no minimum air speed is required for comfort. Furthermore, 0.4 cfm/ft² does not guarantee any particular air speed because 0.4 cfm/ft² can be a small fraction (e.g., 10%) or a large fraction (e.g., 50%) of the design flow rate and, thus, can result in a low or high air speed. The 300 cfm exception is deleted because the situation that it was intended to address has been largely eliminated by the new 50% exception described above. This criterion was intended to address the following applications: the occasional

small zone in a VAV reheat system for which 30% is insufficient to handle heating loads, such as spaces with large north-facing glass areas..

Addendum h to Standard 90.1-2007

Revise the standard as follows (I-P and SI units):

Revise exceptions to Section 6.5.2.1 as follows:

Exceptions to 6.5.2.1:

- a. ~~Zones for which the volume of air that is reheated, recooled, or mixed is no greater than the larger of the following:~~
- ~~The volume of outdoor air required to meet the ventilation requirements of Section 6.2 of ASHRAE Standard 62.1 for the zone,~~
 - ~~0.4 cfm/ft² [2L/s/m²] of the zone conditioned floor area,~~
 - ~~30% of the zone design peak supply rate,~~
 - ~~300 cfm [140L/s] this exception is for zones whose peak flow rate totals no more than 10% of the total fan system flow rate,~~
 - ~~Any higher rate that can be demonstrated, to the satisfaction of the authority having jurisdiction, to reduce overall system annual energy usage by offsetting reheat/recool energy losses through a reduction in outdoor air intake for the system.~~

Exceptions to 6.5.2.1:

- a. Zones for which the volume of air that is reheated, recooled, or mixed is less than the larger of the following:
- 30% of the zone design peak supply rate;
 - The volume of outdoor air required to meet the ventilation requirements of Section 6.2 of ASHRAE Standard 62.1 for the zone;
 - Any higher rate that can be demonstrated, to the satisfaction of the authority having jurisdiction, to reduce overall system annual energy usage by offsetting reheat/recool energy losses through a reduction in outdoor air intake.
- b. Zones that comply with all of the following:
- The volume of air that is reheated, recooled, or mixed in dead band between heating and cooling does not exceed the larger of the following:
 - 20% of the zone design peak supply rate;
 - the volume of outdoor air required to meet the ventilation requirements of Section 6.2 of ASHRAE Standard 62.1 for the zone;
 - any higher rate that can be demonstrated, to the satisfaction of the authority having jurisdiction, to reduce overall system

- annual energy usage by offsetting reheat/recool energy losses through a reduction in outdoor air intake.
2. The volume of air that is reheated, recooled, or mixed in peak heating demand shall be less than 50% of the zone design peak supply rate.
 3. Airflow between *dead band* and full heating or full cooling shall be modulated.
- bc.) *Zones* where special pressurization relationships, cross-contamination requirements, or code-required minimum circulation rates are such that variable-air-volume systems are impractical.
- ed.) *Zones* where at least 75% of the energy for reheating or for providing warm air in mixing systems is provided from a *site-recovered* (including condenser heat) or *site-solar energy source*.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD


This proposal will apply a four-zone lighting power density approach to exterior lighting requirements. This approach recognizes the varying lighting needs and design differences associated with different building locations. It is acceptable and prudent to reduce the light levels as the designer leaves the downtown city center entering into mixed commercial/high-rise residential districts, then enters into residential areas, and then into rural areas. Several organizations, including the IESNA have been working to develop a zonal approach to exterior lighting recommended practice and this change in the standard will follow that guidance.

The specific IESNA documents used in this proposal are RP-20, DG-5, IESNA Handbook, RP-2, G-1 and RP-33. There are some instances where IESNA recommendations in these documents are available for all four zone criteria, but in many cases only three light level recommendations were found and referenced. Other standards use a multizone system to either classify LPD, lumen, or light trespass requirements—California T-24 (4-zone W/sf), the upcoming MOL (5-zone Lumen/sf, and LEED (light trespass). These standards were evaluated and in some cases incorporated into this proposal.


The first change in Section 9.4.5 is the deletion of the 5% additional power allowances, which is replaced by a base wattage allowance per site. The second change to this section is to define the four zones and apply appropriate requirements. The four zones are based on IESNA and other group definitions to match other requirements and guidance expected to be encountered by designers. The majority of building sites will fall into LZ3, LZ2, or LZ1, and the sites that remain in LZ4 will generally be of relatively small sizes. The added “Base Site Allowance” for each zone takes into account that most sites are not rectangular or match the iso-diagram of typical light luminaires.

The associated energy change from this proposal comes from the lower illuminance requirements for primarily zones 1–3, where the majority of buildings are constructed. Numerous point-by-point lighting calculations were performed for parking lots, walkways, stairways, pedestrian tunnels, entries (with and without canopies), sales canopies, service stations, and auto dealerships for the four zones. In the initial calculations for the parking lots, there was a noticeable difficulty in achieving the recommended light level when the space was 20,000 ft² and lower, without any additional power allowance (this was especially true in zone 4). Six odd shaped parking lots were modeled for all four lighting zones to verify that the requirement would cover varying design needs. This modeling

was used to determine appropriate base site allowances. Because of the base site allowance, the actual LPDs are on a sliding scale, as shown below.

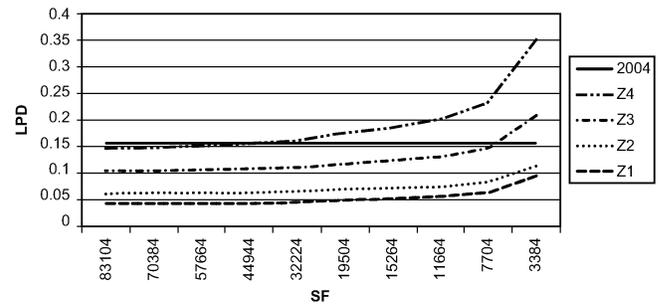

The energy savings from this zone approach is shown in the chart below, with total energy used in each lighting zone for the various square footages. The solid line is the current 2004 standard.

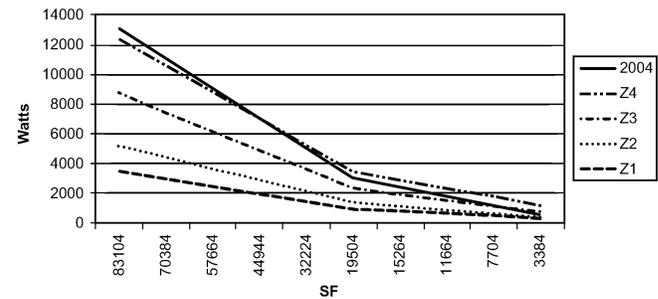

Addendum i to Standard 90.1-2007

Revise the Standard as follows (I-P units):

9.4.5 Exterior Building Lighting Power. The total exterior lighting power allowance for all exterior building applications is the sum of the base site allowance plus the individual allowances for areas that are designed to be illuminated and are lighting power densities permitted in Table 9.4.6 ~~for the applicable lighting zone for these applications plus an additional unrestricted allowance of 5% of that sum.~~ Trade-offs are allowed only among exterior lighting applications listed in the Table 9.4.6 “Tradable Surfaces” section. The lighting zone for the building exterior is determined from Table 9.4.5 unless otherwise specified by the local jurisdiction.

Exceptions to 9.4.5: Lighting used for the following exterior applications is exempt when equipped with a control device that complies with the requirements of Section 9.4.1.3 and is independent of the control of the non-exempt lighting:

- Specialized signal, directional, and marker lighting associated with transportation.
- Advertising signage or directional signage.
- Lighting integral to *equipment* or instrumentation and installed by its *manufacturer*.

TABLE 9.4.5 Exterior Lighting Zones

Lighting Zone	Description
1	Developed areas of national parks, state parks, forest land, and rural areas
2	Areas predominantly consisting of residential zoning, neighborhood business districts, light industrial with limited night-time use and residential mixed use areas
3	All other areas
4	High activity commercial districts in major metropolitan areas as designated by the local jurisdiction

TABLE 9.4.6.5 Individual Lighting Power Allowances/Densities for Building Exteriors

	Zone 1	Zone 2	Zone 3	Zone 4
Base Site Allowance (base allowance may be used in tradable or non-tradable surfaces)	<u>500 W</u>	<u>600 W</u>	<u>750 W</u>	<u>1300 W</u>
Uncovered Parking Areas				
Parking Lots areas and drives	<u>0.04 W/ft²</u>	<u>0.06 W/ft²</u>	<u>0.10 W/ft²</u>	<u>0.15-0.13 W/ft²</u>
Building Grounds				
Walkways less than 10 feet wide	<u>0.7 W/linear foot</u>	<u>0.7 W/linear foot</u>	<u>0.8 W/linear foot</u>	1.0 W/linear foot
Walkways 10 feet wide or greater	<u>0.14 W/ft²</u>	<u>0.14 W/ft²</u>	<u>0.16 W/ft²</u>	0.2 W/ft ²
Plaza areas				
Special Feature Areas				
Stairways	<u>0.75 W/ft²</u>	<u>1.0 W/ft²</u>	<u>1.0 W/ft²</u>	1.0 W/ft ²
Pedestrian tunnels	<u>0.15 W/ft²</u>	<u>0.15 W/ft²</u>	<u>0.2 W/ft²</u>	<u>0.3 W/ft²</u>
Landscaping	<u>0.04 W/ft²</u>	<u>0.05 W/ft²</u>	<u>0.05 W/ft²</u>	<u>0.05 W/ft²</u>
Tradable Surfaces (Lighting power densities for uncovered parking areas, building grounds, building entrances and exits, canopies and overhangs and outdoor sales areas may be traded.)				
Building Entrances and Exits				
Main entries	<u>20 W/linear foot of door width</u>	<u>20 W/linear foot of door width</u>	<u>30 W/linear foot of door width</u>	30 W/linear foot of door width
Other doors	<u>20 W/linear foot of door width</u>	<u>20 W/linear foot of door width</u>	<u>20 W/linear foot of door width</u>	20 W/linear foot of door width
Entry canopies	<u>0.25 W/ft²</u>	<u>0.25 W/ft²</u>	<u>0.4 W/ft²</u>	<u>1.25-0.4 W/ft²</u>
Sales Canopies and Overhangs				
Canopies (free standing and attached and overhangs)	<u>0.6 W/ft²</u>	<u>0.6 W/ft²</u>	<u>0.8 W/ft²</u>	<u>1.25-1.0 W/ft²</u>
Outdoor Sales				
Open areas (including vehicle sales lots)	<u>0.25 W/ft²</u>	<u>0.25 W/ft²</u>	<u>0.5 W/ft²</u>	<u>0.5-7 W/ft²</u>
Street frontage for vehicle sales lots in addition to "open area" allowance	No allowance	<u>10 W/linear foot</u>	<u>10 W/linear foot</u>	<u>20-30 W/linear foot</u>

TABLE 9.4.6.5 Individual Lighting Power Allowances/Densities for Building Exteriors (Continued)

	Building Facades	No allowance	0.1 W/ft ² for each	0.15 W/ft ² for each	0.2 W/ft ² for each
			illuminated wall or surface or 2.5 W/linear foot for each illuminated wall or surface length	illuminated wall or surface or 3.75 W/linear foot for each illuminated wall or surface length	illuminated wall or surface or 5.0 W/linear foot for each illuminated wall or surface length
Non-Tradable Surfaces (Lighting power density calculations for the following applications can be used only for the specific application and can-not be traded between surfaces or with other exterior lighting. The following allowances are in addition to any allowance otherwise permitted in the “tradable Surfaces” section of this table.)	Automated teller machines and night depositories	270 W per location plus 90 W per additional ATM per location	270 W per location plus 90 W per additional ATM per location	270 W per location plus 90 W per additional ATM per location	270 W per location plus 90 W per additional ATM per location
	Entrances and gate-house inspection stations at guarded facilities	0.75 W/ft ² of covered and uncovered area	0.75 W/ft ² of covered and uncovered area	0.75 W/ft ² of covered and uncovered area	1.25 W/ft ² of covered and uncovered area (covered areas are included in the “Canopies and Overhangs” section of “Tradable Surfaces”)
	Loading areas for law enforcement, fire, ambulance and other emergency service vehicles	0.5 W/ft ² of covered and uncovered area	0.5 W/ft ² of covered and uncovered area	0.5 W/ft ² of covered and uncovered area	0.5 W/ft ² of covered and uncovered area (covered areas are included in the “Canopies and Overhangs” section of “Tradable Surfaces”)
	Drive-up windows/doors at fast food restaurants	400 W per drive-through	400 W per drive-through	400 W per drive-through	400 W per drive-through
	Parking near 24-hour retail entrances	800 W per main entry	800 W per main entry	800 W per main entry	800 W per main entry

- d. Lighting for theatrical purposes, including performance, stage, film production, and video production.
- e. Lighting for athletic playing areas.
- f. Temporary lighting.
- g. Lighting for industrial production, material handling, transportation sites, and associated storage areas.
- h. Theme elements in theme/amusement parks.
- i. Lighting used to highlight features of public monuments and registered *historic* landmark structures or buildings.

Revise the Standard as follows (SI units):

9.4.5 Exterior Building Lighting Power. The total exterior lighting power allowance for all exterior building applications is the sum of the base site allowance plus the individual allowances for areas that are designed to be illuminated and are lighting power densities permitted in Table 9.4.6.5 for the applicable lighting zone for these applications plus an additional unrestricted allowance of 5% of that sum. Trade-offs are allowed only among exterior lighting applications listed in the Table 9.4.6.5 “Tradable Surfaces” section. The lighting zone

for the building exterior is determined from Table 9.4.5 unless otherwise specified by the local jurisdiction.

Exceptions to 9.4.5: Lighting used for the following exterior applications is exempt when equipped with a *control device* that complies with the requirements of Section 9.4.1.3 and is independent of the control of the nonexempt lighting:

- a. Specialized signal, directional, and marker lighting associated with transportation.
- b. Advertising signage or directional signage.
- c. Lighting integral to *equipment* or instrumentation and installed by its *manufacturer*.
- d. Lighting for theatrical purposes, including performance, stage, film production, and video production.
- e. Lighting for athletic playing areas.
- f. Temporary lighting.
- g. Lighting for industrial production, material handling, transportation sites, and associated storage areas.
- h. Theme elements in theme/amusement parks.
- i. Lighting used to highlight features of public monuments and registered *historic* landmark structures or buildings.

TABLE 9.4.5 Exterior Lighting Zones

Lighting Zone	Description
1	Developed areas of national parks, state parks, forest land, and rural areas
2	Areas predominantly consisting of residential zoning, neighborhood business districts, light industrial with limited nighttime use and residential mixed use areas
3	All other areas
4	High activity commercial districts in major metropolitan areas as designated by the local jurisdiction

TABLE 9.4.6.5 Individual Lighting Power Allowances/Densities for Building Exteriors

	Zone 1	Zone 2	Zone 3	Zone 4
Base Site Allowance (base allowance may be used in tradable or non-tradable surfaces)	<u>500 W</u>	<u>600 W</u>	<u>750 W</u>	<u>1300 W</u>
Uncovered Parking Areas				
Parking Lots areas and drives	<u>0.43 W/m²</u>	<u>0.65 W/m²</u>	<u>1.1 W/m²</u>	<u>0.45-1.4 W/m²</u>
Building Grounds				
Walkways less than 10 feet wide	<u>2.3 W/linear meter</u>	<u>2.3 W/linear meter</u>	<u>2.6 W/linear meter</u>	3.3 W/linear meter
Walkways 10 feet wide or greater	<u>1.5 W/m²</u>	<u>1.5 W/m²</u>	<u>1.7 W/m²</u>	2.2 W/m ²
Plaza areas				
Special Feature Areas				
Stairways	<u>8.1 W/m²</u>	<u>10.8 W/m²</u>	<u>10.8 W/m²</u>	10.8 W/m ²
Pedestrian tunnels	<u>1.6 W/m²</u>	<u>1.6 W/m²</u>	<u>2.2 W/m²</u>	<u>3.2 W/m²</u>
Landscaping	<u>0.43 W/m²</u>	<u>0.54 W/m²</u>	<u>0.54 W/m²</u>	<u>0.54 W/m²</u>
Tradable Surfaces (Lighting power densities for uncovered parking areas, building grounds, building entrances and exits, canopies and overhangs and outdoor sales areas may be traded.)				
Building Entrances and Exits				
Main entries	<u>66 W/linear meter of door width</u>	<u>66 W/linear meter of door width</u>	<u>98 W/linear meter of door width</u>	98 W/linear meter of door width
Other doors	<u>66 W/linear meter of door width</u>	<u>66 W/linear meter of door width</u>	<u>66 W/linear meter of door width</u>	66 W/linear meter of door width
Entry canopies	<u>2.7 W/m²</u>	<u>2.7 W/m²</u>	<u>4.3 W/m²</u>	<u>1.25-4.3 W/m²</u>
Sales Canopies and Overhangs				
Canopies (free standing and attached and overhangs)	<u>6.5 W/m²</u>	<u>6.5 W/m²</u>	<u>8.6 W/m²</u>	<u>1.25-10.8 W/m²</u>
Outdoor Sales				
Open areas (including vehicle sales lots)	<u>2.7 W/m²</u>	<u>2.7 W/m²</u>	<u>5.4 W/m²</u>	<u>0.5-7.5 W/m²</u>
Street frontage for vehicle sales lots in addition to "open area" allowance	No allowance	<u>33 W/linear meter</u>	<u>33 W/linear meter</u>	<u>20-98 W/linear meter</u>

TABLE 9.4.6.5 Individual Lighting Power Allowances/Densities for Building Exteriors (Continued)

	Building Facades	No allowance	<u>1.1 W/m² for each illuminated wall or surface or 8.2 W/linear meter for each illuminated wall or surface length</u>	<u>1.6 W/m² for each illuminated wall or surface or 12.3 W/linear meter for each illuminated wall or surface length</u>	2.2 W/m ² for each illuminated wall or surface or 16.4 W/linear meter for each illuminated wall or surface length
Non-Tradable Surfaces (Lighting power density calculations for the following applications can be used only for the specific application and can-not be traded between surfaces or with other exterior lighting. The following allowances are in addition to any allowance otherwise permitted in the “tradable Surfaces” section of this table.)	Automated teller machines and night depositories	<u>270 W per location plus 90 W per additional ATM per location</u>	<u>270 W per location plus 90 W per additional ATM per location</u>	<u>270 W per location plus 90 W per additional ATM per location</u>	270 W per location plus 90 W per additional ATM per location
	Entrances and gate-house inspection stations at guarded facilities	<u>8.1 W/m² of covered and uncovered area</u>	<u>8.1 W/m² of covered and uncovered area</u>	<u>8.1 W/m² of covered and uncovered area</u>	4.25 <u>8.1 W/m² of covered and uncovered area (covered areas are included in the “Canopies and Overhangs” section of “Tradable Surfaces”)</u>
	Loading areas for law enforcement, fire, ambulance and other emergency service vehicles	<u>5.4 W/m² of covered and uncovered area</u>	<u>5.4 W/m² of covered and uncovered area</u>	<u>5.4 W/m² of covered and uncovered area</u>	5.4 <u>5.4 W/m² of covered and uncovered area (covered areas are included in the “Canopies and Overhangs” section of “Tradable Surfaces”)</u>
	Drive-up windows/doors at fast food restaurants	<u>400 W per drive-through</u>	<u>400 W per drive-through</u>	<u>400 W per drive-through</u>	400 W per drive-through
	Parking near 24-hour retail entrances	<u>800 W per main entry</u>	<u>800 W per main entry</u>	<u>800 W per main entry</u>	800 W per main entry

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This addendum is intended to update the mechanical test procedures and references in ANSI/ASHRAE/IESNA Standard 90.1-2007. The changes modify a reference in Table 6.8.1E, the normative references in Chapter 12, and the informative references in Informative Appendix E.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~strikethrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum j to Standard 90.1-2007

Revise as follows (I-P and SI units):

Modify Section 12, Normative References, as follows.

Reference	Title
AMCA 500 D-98	<u>Test Methods for Louvers, Dampers and Shutters</u>
AMCE 500-D-07	<u>Laboratory Methods of Testing Dampers for Rating</u>
ANSI Z21.10.3- 1998 <u>2004</u>	Gas Water Heater, Volume 3, Storage, with Input Ratings above 75,000 Btu/h, Circulating and Instantaneous Water Heaters
ANSI Z21.47- 2001 <u>2006</u>	Gas-Fired Central Furnaces (Except Direct Vent and Separated Combustions System Furnaces)
ANSI Z21.83.8- 2002 <u>2006</u>	Gas Unit Heaters and Duct Furnaces
ANSI/AHAM RAC-1- 87 <u>2003</u>	Room Air Conditioners
ARI 210/240- 2003 <u>2006</u>	Unitary Air Conditioning and Air-Source Heat Pump Equipment
ARI 460- 2000 <u>2005</u>	Remote Mechanical Draft Air Cooled Refrigerant Condensers
ARI 550/590- 98 <u>2003</u>	Water-Chilling Packages Using the Vapor Compression Cycle
UL 181A- 94 <u>2005</u>	Closure Systems for Use with Rigid Air Ducts and Air Connectors
UL 181B- 95 <u>2006</u>	Closure Systems for Use with Flexible Air Ducts and Air Connectors
ANSI/ASHRAE 146- 1998 <u>2006</u>	Method of Testing for Rating Pool Heaters

Modify Informative Appendix E as follows.

(This appendix is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

CRRC

Cool Roof Rating Council
 1738 Excelsior Avenue
 Oakland, CA 94602
 (T) 866-465-2523
~~(T) 510-482-4420~~
 (F) 510-482-4421
 www.coolroofs.org

~~CRRC-1-2002~~ 2006

~~2007~~ ASHRAE Handbook—Fundamentals

MICA Insulation Standards—~~1999~~ 6th Edition

SMACNA Duct Construction Standards—~~1995~~ 2005

~~2003~~ ASHRAE Handbook—HVAC Applications

AABC 2002

Cool Roof Rating Council Product Rating Program

ASHRAE

National Commercial and Industrial Insulation Standards

HVAC Duct Construction Standards, Metal and Flexible

Chapter 49, Service Water Heating/ASHRAE

~~Associated Air Balance Council Test and Balance Procedures~~
Associated Air Balance Council, National Standards for Total System Balance

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This addendum revises Tables 6.8.1E and 7.8 in ANSI/ASHRAE/IESNA Standard 90.1-2007, identifying the specific sections of the referenced standards. Table 7.8 is also updated

to reflect the current federal efficiency levels for residential water heaters. Additionally, a requirement in Table 7.8 for electric table top water heaters has been added.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~strike through~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum k to Standard 90.1-2007

Revise as follows (I-P units):

TABLE 6.8.1E Warm Air Furnaces and Combination Warm Air Furnaces/Air-Conditioning Units, Warm Air Duct Furnaces, and Unit Heaters

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	Minimum Efficiency ^a	Test Procedure ^b
Warm Air Furnace, Gas-Fired	<225,000 Btu/h		78% AFUE or 80% E_{td}	DOE 10 CFR Part 430 or <u>Section 2.39, Thermal Efficiency, of ANSI Z21.47</u>
	≥225,000 Btu/h	Maximum Capacity ^d	80% E_{cc}	<u>Section 2.39, Thermal Efficiency, of ANSI Z21.47</u>
Warm Air Furnace, Oil-Fired	<225,000 Btu/h		78% AFUE or 80% E_{td}	DOE 10 CFR Part 430 or <u>Section 42, Combustion, of UL 727</u>
	≥225,000 Btu/h	Maximum Capacity ^e	81% E_{tf}	<u>Section 42, Combustion, of UL 727</u>
Warm Air Duct Furnaces, Gas-Fired	All Capacities	Maximum Capacity ^e	80% E_{cg}	<u>Section 2.10, Efficiency, of ANSI Z83.9</u> 8
Warm Air Unit Heaters, Gas-Fired	All Capacities	Maximum Capacity ^e	80% E_{cg}	<u>Section 2.10, Efficiency, of ANSI Z83.8</u>
Warm Air Unit Heaters, Oil-Fired	All Capacities	Maximum Capacity ^e	80% E_{cg}	<u>Section 40, Combustion, of UL 731</u>

^a E_f = thermal efficiency. See test procedure for detailed discussion.

^b Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

^c E_c = combustion efficiency. Units must also include an interrupted or intermittent ignition device (IID), have jacket losses not exceeding 0.75% of the input rating, and have either power venting or a flue damper. A vent damper is an acceptable alternative to a flue damper for those furnaces where combustion air is drawn from the conditioned space.

^d Combination units not covered by NAECA (three-phase power or cooling capacity greater than or equal to 65,000 Btu/h) may comply with either rating.

^e Minimum and maximum ratings as provided for and allowed by the unit's controls.

^f E_t = thermal efficiency. Units must also include an interrupted or intermittent ignition device (IID), have jacket losses not exceeding 0.75% of the input rating, and have either power venting or a flue damper. A vent damper is an acceptable alternative to a flue damper for those furnaces where combustion air is drawn from the conditioned space.

^g E_c = combustion efficiency (100% less flue losses). See test procedure for detailed discussion.

Revise as follows (I-P units):

TABLE 7.8 Performance Requirements for Water Heating Equipment

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	Performance Required ^a	Test Procedure ^{b,c}
Electric Table Top Water Heaters	≤12 kW	Resistance ≥20 gal	0.93-0.00132V EF	DOE 10 CFR Part 430
Electric Water Heaters	≤12 kW	Resistance ≥20 gal	0.93-0.00132V EF	DOE 10 CFR Part 430
	>12 kW	Resistance ≥20 gal	20 + 35 √V SL, Btu/h	Section G.2 of ANSI Z21.10.3
	≤24 Amps and ≤250 Volts	Heat Pump	0.93-0.00132V EF	DOE 10 CFR Part 430
Gas Storage Water Heaters	≤75,000 Btu/h	≥20 gal	0.62-0.0019V EF	DOE 10 CFR Part 430
	>75,000 Btu/h	<4000 (Btu/h)/gal	80% E_t (Q/800 + 110 √V) SL, Btu/h	Sections G.1 and G.2 of ANSI Z21.10.3
Gas Instantaneous Water Heaters	>50,000 Btu/h and <200,000 Btu/h	≥4000 (Btu/h)/gal and <2 gal	0.62-0.0019V EF	DOE 10 CFR Part 430
	≥200,000 Btu/h ^{e,d}	≥4000 (Btu/h)/gal and <10 gal	80% E_t	Sections G.1 and G.2 of ANSI Z21.10.3
	≥200,000 Btu/h	≥4000 (Btu/h)/gal and ≥10 gal	80% E_t (Q/800 + 110 √V) SL, Btu/h	
Oil Storage Water Heaters	≤105,000 Btu/h	≥20 gal	0.59-0.0019V EF	DOE 10 CFR Part 430
	>105,000 Btu/h	<4000 (Btu/h)/gal	78% E_t (Q/800 + 110 √V) SL, Btu/h	Sections G.1 and G.2 of ANSI Z21.10.3
Oil Instantaneous Water Heaters	≤210,000 Btu/h	≥4000 (Btu/h)/gal and <2 gal	0.59-0.0019V EF	DOE 10 CFR Part 430
	>210,000 Btu/h	≥4000 (Btu/h)/gal and <10 gal	80% E_t	Sections G.1 and G.2 of ANSI Z21.10.3
	>210,000 Btu/h	≥4000 (Btu/h)/gal and ≥10 gal	78% E_t (Q/800 + 110 √V) SL, Btu/h	
Hot Water Supply Boilers, Gas and Oil	≥300,000 Btu/h and <12,500,000 Btu/h	≥4000 (Btu/h)/gal and <10 gal	80% E_t	Sections G.1 and G.2 of ANSI Z21.10.3
Hot Water Supply Boilers, Gas		≥4000 (Btu/h)/gal and ≥10 gal	80% E_t (Q/800 + 110 √V) SL, Btu/h	
Hot Water Supply Boilers, Oil		≥4000 (Btu/h)/gal and ≥10 gal	78% E_t (Q/800 + 110 √V) SL, Btu/h	
Pool Heaters Oil and Gas	All		78% E_t	ASHRAE 146
Heat Pump Pool Heaters	All		4.0 COP	ASHRAE 146
Unfired Storage Tanks	All		R-12.5	(none)

^a Energy factor (EF) and thermal efficiency (E_t) are minimum requirements, while standby loss (SL) is maximum Btu/h based on a 70°F temperature difference between stored water and ambient requirements. In the EF equation, V is the rated volume in gallons. In the SL equation, V is the rated volume in gallons and Q is the nameplate input rate in Btu/h.

^b Section 12 contains a complete specification, including the year version, of the referenced test procedure.

^c Section G1 is titled "Test Method for Measuring Thermal Efficiency" and Section G2 is titled "Test Method for Measuring Standby Loss."

^d Instantaneous water heaters with input rates below 200,000 Btu/h must comply with these requirements if the water heater is designed to heat water to temperatures 180°F or higher.

Revise as follows (SI units):

TABLE 6.8.1E Warm Air Furnaces and Combination Warm Air Furnaces/Air-Conditioning Units, Warm Air Duct Furnaces, and Unit Heaters

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	Minimum Efficiency ^a	Test Procedure ^b
Warm Air Furnace, Gas-Fired	<66 kW		78% AFUE or 80% E_{td}	DOE 10 CFR Part 430 or <u>Section 2.39, Thermal Efficiency, of ANSI Z21.47</u>
	≥66 kW	Maximum Capacity ^d	80% E_{cc}	<u>Section 2.39, Thermal Efficiency, of ANSI Z21.47</u>
Warm Air Furnace, Oil-Fired	<66 kW		78% AFUE or 80% E_{td}	DOE 10 CFR Part 430 or <u>Section 42, Combustion, of UL 727</u>
	≥66 kW	Maximum Capacity ^e	81% E_{tf}	<u>Section 42, Combustion, of UL 727</u>
Warm Air Duct Furnaces, Gas-Fired	All Capacities	Maximum Capacity ^e	80% E_{cg}	<u>Section 2.10, Efficiency, of ANSI Z83.8</u>
Warm Air Unit Heaters, Gas-Fired	All Capacities	Maximum Capacity ^e	80% E_{cg}	<u>Section 2.10, Efficiency, of ANSI Z83.8</u>
Warm Air Unit Heaters, Oil-Fired	All Capacities	Maximum Capacity ^e	80% E_{cg}	<u>Section 40, Combustion, of UL 731</u>

^a E_t = thermal efficiency. See test procedure for detailed discussion.

^b Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

^c E_c = combustion efficiency. Units must also include an interrupted or intermittent ignition device (IID), have jacket losses not exceeding 0.75% of the input rating, and have either power venting or a flue damper. A vent damper is an acceptable alternative to a flue damper for those furnaces where combustion air is drawn from the conditioned space.

^d Combination units not covered by NAECA (3-phase power or cooling capacity greater than or equal to 19 kW) may comply with either rating.

^e Minimum and maximum ratings as provided for and allowed by the unit's controls.

^f E_t = thermal efficiency. Units must also include an interrupted or intermittent ignition device (IID), have jacket losses not exceeding 0.75% of the input rating, and have either power venting or a flue damper. A vent damper is an acceptable alternative to a flue damper for those furnaces where combustion air is drawn from the conditioned space.

^g E_c = combustion efficiency (100% less flue losses). See test procedure for detailed discussion.

Revise as follows (SI units):

TABLE 7.8 Performance Requirements for Water Heating Equipment

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	(SI Criteria) Performance Required ^a	Test Procedure ^{b,c}
Electric Table Top Water Heaters	≤12 kW	Resistance ≥75.7 L	0.93-0.00035V EF	DOE 10 CFR Part 430
Electric Water Heaters	≤12 kW	Resistance ≥75.7 L	0.93-0.00035V EF	DOE 10 CFR Part 430
	>12 kW	Resistance ≥75.7 L	5.9 + 5.3 √V SL, W	Section G.2 of ANSI Z21.10.3
	≤24 Amps and ≤250 Volts	Heat Pump	0.93-0.00035V EF	DOE 10 CFR Part 430
Gas Storage Water Heaters	≤22.98 kW	≥75.7 L	0.62-0.0005V EF	DOE 10 CFR Part 430
	>22.98 kW	<309.75 W/L	80% E_t (Q/800 + 16.6√V) SL, W	Sections G.1 and G.2 of ANSI Z21.10.3
Gas Instantaneous Water Heaters	>14.66 kW and <58.62 kW	≥309.75 W/L and <7.57 L	0.62-0.0005V EF	DOE 10 CFR Part 430
	≥58.62 kW ^{e,d}	≥309.75 W/L and <37.85 L	80% E_t	Sections G.1 and G.2 of ANSI Z21.10.3
	≥58.62 kW	≥309.75 W/L and ≥37.85 L	80% E_t (Q/800 + 16.6√V) SL, W	
Oil Storage Water Heaters	≤30.78 kW	≥75.7 L	0.59-0.0005V EF	DOE 10 CFR Part 430
	>30.78 kW	<309.75 W/L	78% E_t (Q/800 + 16.6√V) SL, W	Sections G.1 and G.2 of ANSI Z21.10.3
Oil Instantaneous Water Heaters	≤61.55 kW	≥309.75 W/L and <7.57 L	0.59-0.0005V EF	DOE 10 CFR Part 430
	>61.55 kW	≥309.75 W/L and <37.85 L	80% E_t	Sections G.1 and G.2 of ANSI Z21.10.3
	>61.55 kW	≥309.75 W/L and ≥37.85 L	78% E_t (Q/800 + 16.6√V) SL, W	
Hot Water Supply Boilers, Gas and Oil	≥87.93 kW and <3663.8 kW	≥309.75 W/L and <37.85 L	80% E_t	Sections G.1 and G.2 of ANSI Z21.10.3
Hot Water Supply Boilers, Gas		≥309.75 W/L and ≥37.85 L	80% E_t (Q/800 + 16.6√V) SL, W	
Hot Water Supply Boilers, Oil		≥309.75 W/L and ≥37.85 L	78% E_t (Q/800 + 16.6√V) SL, W	
Pool Heaters Oil and Gas	All		78% E_t	ASHRAE 146
Heat Pump Pool Heaters	All		4.0 COP	ASHRAE 146
Unfired Storage Tanks	All		R-2.2	(none)

^a Energy factor (EF) and thermal efficiency (E_t) are minimum requirements, while standby loss (SL) is maximum W based on a 39°C temperature difference between stored water and ambient requirements. In the EF equation, V is the rated volume in liters. In the SL equation, V is the rated volume in liters and Q is the nameplate input rate in Watts.

^b Section 12 contains a complete specification, including the year version, of the referenced test procedure.

^c Section G1 is titled "Test Method for Measuring Thermal Efficiency" and Section G2 is titled "Test Method for Measuring Standby Loss."

^d Instantaneous water heaters with input rates below 58.62 kW must comply with these requirements if the water heater is designed to heat water to temperatures 82.2°C or higher.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

The purpose of this addendum is to add minimum efficiency and certification requirements for both axial and centrifugal fan closed-circuit cooling towers (also known as fluid coolers) into Table 6.8.1G. In addition, a reference to ATC-105S, The Cooling Technology Institute (CTI) test standard for closed-circuit cooling towers, has been added to Section 12, Normative References. A subcommittee of ASHRAE TC 8.6, Technical Committee on Cooling Towers and Evaporative Condensers, developed this addendum, which has been unanimously supported by the entire TC.

Closed-circuit cooling towers differ from open-circuit cooling towers in that the process fluid is kept isolated from the open loop spray water and airflow by an intermediate heat exchanger, typically a coil. Closed-circuit devices also have an integral spray pump to recirculate the spray water over the

coil. To account for this, the gpm/hp value for closed-circuit cooling towers includes both the unit fan and spray pump motors, where hp equals the sum of the fan motor and integral spray pump motor nameplate horsepower. Lastly, the minimum efficiency values for closed-circuit cooling towers are based on typical water-source heat pump conditions, as the water-source heat pump industry is the largest HVAC market for this type of equipment.

The addition of minimum efficiency and certification requirements will provide consulting engineers, system designers, and contractors guidelines for the selection of independently certified, energy-efficient closed-circuit cooling towers. This change will also complement the existing minimum efficiency and certification requirements for open-circuit cooling towers, helping to prevent confusion between the requirements for these two different types of cooling towers.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striking through~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum I to Standard 90.1-2007

Revise as follows (I-P units):

TABLE 6.8.1G Performance Requirements for Heat Rejection Equipment

Equipment Type ^d	Total System Heat Rejection Capacity at Rated Conditions	Subcategory or Rating Condition	Performance Required ^{a,b,c}	Test Procedure ^{ed,e}
Propeller or Axial Fan Open-Circuit Cooling Towers	All	95°F Entering Water 85°F Leaving Water 75°F wb <u>Outdoor air Entering wb</u>	≥ 38.2 gpm/hp	CTI ATC-105 and CTI STD-201
Centrifugal Fan Open-Circuit Cooling Towers	All	95°F Entering Water 85°F Leaving Water 75°F wb <u>Outdoor air Entering wb</u>	≥ 20.0 gpm/hp	CTI ATC-105 and CTI STD-201
Propeller or Axial Fan Closed-Circuit Cooling Towers	All	<u>102°F Entering Water</u> <u>90°F Leaving Water</u> <u>75°F Entering wb</u>	≥ 14.0 gpm/hp	<u>CTI ATC-105S and</u> <u>CTI STD-201</u>
Centrifugal Closed-Circuit Cooling Towers	All	<u>102°F Entering Water</u> <u>90°F Leaving Water</u> <u>75°F Entering wb</u>	≥ 7.0 gpm/hp	<u>CTI ATC-105S and</u> <u>CTI STD-201</u>
Air-Cooled Condensers	All	125°F Condensing Temperature R-22 Test Fluid 190°F Entering Gas Temperature 15°F Subcooling 95°F Entering db	≥ 176,000 Btu/h·hp	ARI 460

^a For purposes of this table, open-circuit cooling tower performance is defined as the water flow rating of the tower at the thermal rating condition listed in Table 6.8.1G divided by the fan nameplate rated motor nameplate power.

^b For purposes of this table, closed-circuit cooling tower performance is defined as the process water flow rating of the tower at the thermal rating condition listed in Table 6.8.1G divided by the sum of the fan motor nameplate power and the integral spray pump motor nameplate power.

^{bc} For purposes of this table, air-cooled condenser performance is defined as the heat rejected from the refrigerant divided by the fan nameplate rated motor nameplate power.

^{ed} Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

^{de} The efficiencies for open-cooling-towers listed in Table 6.8.1G are not applicable for closed-circuit cooling towers. The efficiencies and test procedures for both open- and closed-circuit cooling towers are not applicable to hybrid cooling towers that contain a combination of separate wet and dry heat exchange sections.

Revise Section 12 as follows:

Reference	Title
CTI ATC-105 (00)	Acceptance Test Code for Water Cooling Towers
<u>CTI ATC-105S (96)</u>	<u>Acceptance Test Code for Closed Circuit Cooling Towers</u>
CTI STD-201 (04)	Standard for the Certification of Water-Cooling Tower Thermal Performance

Revise as follows (SI units):

TABLE 6.8.1G Performance Requirements for Heat Rejection Equipment

Equipment Type ^d	Total System Heat Rejection Capacity at Rated Conditions	Subcategory or Rating Condition	Performance Required ^{a,b,c}	Test Procedure ^{ed,e}
Propeller or Axial Fan Open-Circuit Cooling Towers	All	35°C Entering Water 29°C Leaving Water 24°C wb <u>Outdoor air Entering wb</u>	≥ 3.23 L/s·kW	CTI ATC-105 and CTI STD-201
Centrifugal Fan Open-Circuit Cooling Towers	All	35°C Entering Water 29°C Leaving Water 24°C wb <u>Outdoor air Entering wb</u>	≥ 1.70 L/s·kW	CTI ATC-105 and CTI STD-201
Propeller or Axial Fan Closed-Circuit Cooling Towers	All	39°C Entering Water 32°C Leaving Water 24°C Entering wb	≥ 1.18 L/s·kW	CTI ATC-105S and CTI STD-201
Centrifugal Closed-Circuit Cooling Towers	All	39°C Entering Water 32°C Leaving Water 24°C Entering wb	≥ 0.59 L/s·kW	CTI ATC-105S and CTI STD-201
Air-Cooled Condensers	All	52°C Condensing Temperature R-22 Test Fluid 88°C Entering Gas Temperature 8°C Subcooling 35°C Entering db	≥ 69 COP	ARI 460

^a For purposes of this table, open-circuit cooling tower performance is defined as the water flow rating of the tower at the thermal rating condition listed in Table 6.8.1G divided by the fan nameplate rated motor nameplate power.

^b For purposes of this table, closed-circuit cooling tower performance is defined as the process water flow rating of the tower at the thermal rating condition listed in Table 6.8.1G divided by the sum of the fan motor nameplate power and the integral spray pump motor nameplate power.

^{bc} For purposes of this table, air-cooled condenser performance is defined as the heat rejected from the refrigerant divided by the fan nameplate rated motor nameplate power.

^{ed} Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

^{de} The efficiencies for open cooling towers listed in Table 6.8.1G are not applicable for closed-circuit cooling towers. The efficiencies and test procedures for both open- and closed-circuit cooling towers are not applicable to hybrid cooling towers that contain a combination of separate wet and dry heat exchange sections.

Revise Section 12 as follows:

Reference	Title
CTI ATC-105 (00)	Acceptance Test Code for Water Cooling Towers
<u>CTI ATC-105S (96)</u>	<u>Acceptance Test Code for Closed Circuit Cooling Towers</u>
CTI STD-201 (04)	Standard for the Certification of Water-Cooling Tower Thermal Performance

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Product development for water-cooled chillers in recent years has focused on improving both full-load and part-load performance. Variable-speed drives (VSDs) have gone through significant technology advancements and are now finding application in water-cooled chillers. The use of VSDs shows significant improvement of chiller integrated part-load value (IPLV). Improvements of up to 30% in IPLV are possible. Partially offsetting the part-load performance improvement is a small decrease in full-load efficiency at design conditions, nominally up to 4%. The decrease in full-load efficiency is due to inherent electronic drive losses and power line filters.

This addendum establishes—effective January 1, 2010—an additional path of compliance for water-cooled chillers. Path A is intended for applications where significant operating time is expected at full-load conditions. On the other hand, Path B is an alternative set of efficiency levels for water-cooled chillers intended for applications where significant time is expected at part load. Compliance with the standard can be achieved by meeting the requirements of either Path A or Path B. However, both full-load and IPLV levels must be met to fulfill the requirements of Path A or Path B.

The addendum also combines all water-cooled positive displacement chillers into one category and adds a new size category for centrifugal chillers at or above 600 tons. The air-cooled chiller without condenser equipment category has been eliminated. All air-cooled chillers without condensers must now be rated with matching condensers. The minimum efficiencies of air-cooled chillers have also been updated. The minimum efficiencies for absorption chillers were left unchanged, as efficiencies have not improved over the last few years and the absorption market has been shrinking, with less than 150 units sold in the US in 2006. Efficiencies in the I-P version of the standard are now expressed in EER for air-cooled chillers, kW/ton for water-cooled chillers, and COP for absorption chillers to reflect industry practices. Tables 6.8.1H through 6.8.1J, listing minimum full-load and NPLV efficiencies of water-cooled centrifugal chillers at nonstandard rating conditions, have been eliminated and replaced by an algebraic equation. The tables will now be included in the 90.1 User's Manual.

The effective date of the new efficiency standards is January 1, 2010, to coincide with the phase-out date of HCFC-22 mandated under the Clean Air Act of 1992. This addendum is expected to save 457.6 GWh of energy per year compared to the requirements of ASHRAE/IESNA Standard 90.1-2004. This represents an annual energy saving of 13.3%.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~strike through~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum m to 90.1-2007

Modify Section 6.4.1.2 as follows (I-P units).

6.4.1.2 Minimum Equipment Efficiencies—Listed Equipment—Nonstandard Conditions. Water-cooled centrifugal water-chilling packages that are not designed for operation at ARI Standard 550/590 test conditions (and thus cannot be tested to meet the requirements of Table 6.8.1C) of 44°F leaving chilled-water temperature and 85°F entering condenser water temperature with 3 gpm/ton condenser water flow shall have ~~minimum~~ maximum full-load kW/ton COP and ~~minimum~~ NPLV ratings as shown in the tables referenced below, ~~adjusted~~ using the following equation:

- a. ~~Centrifugal chillers <150 tons shall meet the minimum full load COP and IPLV/NPLV in Table 6.8.1H.~~
- b. ~~Centrifugal chillers ≥150 tons and <300 tons shall meet the minimum full load COP and IPLV/NPLV in Table 6.8.1H.~~
- e. ~~Centrifugal chillers ≥300 tons shall meet the minimum full load COP and IPLV/NPLV in Table 6.8.1H.~~

$$\text{Adjusted maximum full-load kW/ton rating} \\ = (\text{full-load kW/ton from Table 6.8.1C})/K_{adj}$$

$$\text{Adjusted maximum NPLV rating} \\ = (\text{IPLV from Table 6.8.1C})/K_{adj}$$

where

$$K_{adj} = \frac{6.174722 - 0.303668(X) + 0.00629466(X)^2}{-0.000045780(X)^3}$$

$$X = \frac{DT_{std} + \text{LIFT}}{24 + (\text{full-load kW/ton from Table 6.8.1C}) \times 6.83} / \text{Flow}$$

$$DT_{std} = \frac{24 + (\text{full-load kW/ton from Table 6.8.1C}) \times 6.83}{\text{Flow}}$$

$$\text{Flow} = \frac{\text{Condenser water flow (gpm)}}{\text{Cooling full-load capacity (tons)}}$$

$$\text{LIFT} = \text{CEWT} - \text{CLWT}$$

$$\text{CEWT} = \text{Full-load condenser entering water temperature (°F)}$$

$$\text{CLWT} = \text{Full-load leaving chilled-water temperature (°F)}$$

The table adjusted full-load and NPLV values are only applicable over the following full-load design ranges:

- Minimum Leaving Chiller-Water Temperature: 40°F to ~~48°F~~ 38°F
- Maximum Condenser Entering ~~Condenser~~ Water Temperature: ~~75°F to 85°F~~ 102°F
- Condenser Water ~~Temperature Rise: 5°F to 15°F~~ Flow: 1 to 6 gpm/ton
- X ≥ 39°F and ≤ 60°F

Chillers designed to operate outside of these ranges or applications utilizing fluids or solutions with secondary coolants (e.g., glycol solutions or brines) with a freeze point of 27°F or lower for freeze protection are not covered by this standard.

Example: Path A 600 ton centrifugal chiller
Table 6.8.1C efficiencies as of 1/1/2010
Full Load = 0.570 kW/ton
IPLV = 0.539 kW/ton
CEWT = 80°F
Flow = 2.5 gpm/ton
CLWT = 42°F

$$\begin{aligned} \text{LIFT} &= 80 - 42 = 38^\circ\text{F} \\ \text{DT} &= (24 + 0.570 \times 6.83) / 2.5 = 11.16^\circ\text{F} \\ X &= 38 + 11.16 = 49.16^\circ\text{F} \\ K_{adj} &= 6.174772 - 0.303668(49.16) + \\ & 0.00629466(49.16)^2 - 0.00004578(49.16)^3 \\ &= 1.020 \end{aligned}$$

$$\begin{aligned} \text{Adjusted full load} &= 0.570 / 1.020 = \\ & 0.559 \text{ kW/ton} \\ \text{NPLV} &= 0.539 / 1.020 = 0.528 \text{ kW/ton} \end{aligned}$$

Delete Tables 6.8.1C, 6.8.1H, 6.8.1I, and 6.8.1J in their entirety.

Insert new Table 6.8.1C as follows and renumber the remaining tables appropriately.

TABLE 6.8.1C Water Chilling Packages—Efficiency Requirements^a

Equipment Type	Size Category	Units	Before 1/1/2010		As of 1/1/2010 ^c				Test Procedure ^b
			Full Load	IPLV	Path A		Path B		
					Full Load	IPLV	Full Load	IPLV	
Air-Cooled Chillers	<150 tons	EER	≥9.562	≥10.416	≥9.562	≥12.500	NA ^d	NA ^d	ARI 550/590
	≥150 tons	EER			≥9.562	≥12.750	NA ^d	NA ^d	
Air-Cooled without Condenser, Electrical Operated	All Capacities	EER	≥10.586	≥11.782	Air-cooled chillers without condensers must be rated with matching condensers and comply with the air-cooled chiller efficiency requirements				
Water Cooled, Electrically Operated, Reciprocating	All Capacities	kW/ton	≤0.837	≤0.696	Reciprocating units must comply with water cooled positive displacement efficiency requirements				
Water Cooled, Electrically Operated, Positive Displacement	<75 tons	kW/ton	≤0.790	≤0.676	≤0.780	≤0.630	≤0.800	≤0.600	
	≥75 tons and < 150 tons	kW/ton	≤0.790	≤0.676	≤0.775	≤0.615	≤0.790	≤0.586	
	≥150 tons and < 300 tons	kW/ton	≤0.717	≤0.627	≤0.680	≤0.580	≤0.718	≤0.540	
	≥300 tons	kW/ton	≤0.639	≤0.571	≤0.620	≤0.540	≤0.639	≤0.490	
Water Cooled, Electrically Operated, Centrifugal	<150 tons	kW/ton	≤0.703	≤0.669	≤0.634	≤0.596	≤0.639	≤0.450	
	≥150 tons and < 300 tons	kW/ton	≤0.634	≤0.596	≤0.634	≤0.596	≤0.639	≤0.450	
	≥300 tons and < 600 tons	kW/ton	≤0.576	≤0.549	≤0.576	≤0.549	≤0.600	≤0.400	
	≥600 tons	kW/ton	≤0.576	≤0.549	≤0.570	≤0.539	≤0.590	≤0.400	
Air Cooled Absorption Single Effect	All Capacities	COP	≥0.600	NR ^e	≥0.600	NR ^e	NA ^d	NA ^d	ARI 560
Water-Cooled Absorption Single Effect	All Capacities	COP	≥0.700	NR ^e	≥0.700	NR ^e	NA ^d	NA ^d	
Absorption Double Effect Indirect-Fired	All Capacities	COP	≥1.000	≥1.050	≥1.000	≥1.050	NA ^d	NA ^d	
Absorption Double Effect Direct-Fired	All Capacities	COP	≥1.000	≥1.000	≥1.000	≥1.000	NA ^d	NA ^d	

a. The chiller equipment requirements do not apply for chillers used in low-temperature applications where the design leaving fluid temperature is < 40°F.
b. Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.
c. Compliance with this standard can be obtained by meeting the minimum requirements of Path A or Path B. However, both the full load and IPLV must be met to fulfill the requirements of Path A or Path B.
d. NA means that this requirement is not applicable and cannot be used for compliance.
e. NR means that there are no minimum requirements for this category.

Modify Section 6.4.1.2 as follows (SI units).

6.4.1.2 Minimum Equipment Efficiencies—Listed Equipment—Nonstandard Conditions. Water-cooled centrifugal water-chilling packages that are not designed for operation at ARI Standard 550/590 test conditions (and thus cannot be tested to meet the requirements of Table 6.8.1C) of 6.7°C leaving chilled-water temperature and 29.4°C entering condenser water temperature with ~~15.3 L/min·kW~~ 0.054 L/s·kW condenser water flow shall have a minimum full-load COP and a ~~minimum-NPLV ratings as shown in tables referenced below.~~ adjusted using the following equation:

- a. ~~(a) Centrifugal chillers <528 kW shall meet the minimum full load COP and IPLV/NPLV in Table 6.8.1H.~~
- b. ~~(b) Centrifugal chillers ≥528 kW and <1055 kW shall meet the minimum full load COP and IPLV/NPLV in Table 6.8.1I~~
- e. ~~(c) Centrifugal chillers ≥1055 kW shall meet the minimum full load COP and IPLV/NPLV in Table 6.8.1J.~~

$$\text{Adjusted minimum full-load COP rating} \\ = (\text{full-load COP from Table 6.8.1C}) \times K_{adj}$$

$$\text{Adjusted maximum NPLV rating} \\ = (\text{IPLV from Table 6.8.1C}) \times K_{adj}$$

where

$$K_{adj} = \frac{6.174722 - 0.5466024(X) + 0.020394698(X)^2 - 0.000266989(X)^3}{DT_{std} + LIFT}$$

$$X = \frac{DT_{std} + LIFT}{DT_{std}}$$

$$DT_{std} = \frac{(0.267114 + 0.267088/(\text{Full-load COP from Table 6.8.1C}))/\text{Flow}}$$

$$\text{Flow} = \frac{\text{Condenser water flow (L/s)}/\text{Cooling full load capacity (kW)}}$$

$$LIFT = \text{CEWT} - \text{CLWT} (\text{°C})$$

$$\text{CEWT} = \text{Full load condenser entering water temperature (°C)}$$

$$\text{CLWT} = \text{Full load leaving chilled-water temperature (°C)}$$

The ~~table~~ adjusted full-load and NPLV values are only applicable over the following full-load design ranges:

- Minimum Leaving Chiller-Water Temperature: 4.4°C to 8.9°C ~~3.3°C~~
- Maximum Condenser Entering Condenser Water Temperature: 23.9°C to 29.4°C ~~39°C~~
- Condenser Water Temperature Rise: 2.8°C to 8.3°F ~~Flow: .036 to .0721 L/s·kW~~
- X ≥ 21.7°C and ≤ 33.3°C

Chillers designed to operate outside of these ranges or applications utilizing fluids or solutions with secondary coolants (e.g., glycol solutions or brines) with a freeze point of -2.8°C or lower for freeze protection are not covered by this standard.

Example: Path A 2110 kW centrifugal chiller Table 6.8.1C efficiencies as of 1/1/2010

$$\text{Full Load} = 6.170 \text{ COP}$$

$$\text{IPLV} = 6.525 \text{ COP}$$

$$\text{CEWT} = 26\text{°C}$$

$$\text{Flow} = 0.05 \text{ L/s·kW}$$

$$\text{CLWT} = 5.5\text{°C}$$

$$\text{LIFT} = 26 - 5.5 = 20.50\text{°C}$$

$$DT = \frac{(0.267114 + 0.267088/6.170)/0.05}{6.208\text{°C}}$$

$$X = 21.11 + 6.208 = 27.319\text{°F}$$

$$K_{adj} = \frac{6.174722 - 0.5466024(27.319) + 0.020394698(27.319)^2 - 0.000266989(27.319)^3}{1.031}$$

$$\text{Adjusted full load} = 6.170 \times 1.031 = 6.359 \text{ COP}$$

$$\text{NPLV} = 6.525 \times 1.031 = 6.725 \text{ COP}$$

Delete Tables 6.8.1C, 6.8.1H, 6.8.1I, and 6.8.1J in their entirety.

Insert new Table 6.8.1C as follows and renumber the remaining tables appropriately.

TABLE 6.8.1C Water Chilling Packages—Efficiency Requirements^a

Equipment Type	Size Category	Units	Before 1/1/2010		As of 1/1/2010 ^c				Test Procedure ^b
			Full Load	IPLV	Path A		Path B		
					Full Load	IPLV	Full Load	IPLV	
Air-Cooled Chillers	<528 kW	COP	≥2.802	≥3.050	≥2.802	≥3.664	NA ^d	NA ^d	ARI 550/590
	≥528 kW	COP			≥2.802	≥3.737	NA ^d	NA ^d	
Air-Cooled without Condenser, Electrically Operated	All Capacities	COP	≥3.100	≥3.450	Air-cooled chillers without condensers must be rated with matching condensers and comply with the air-cooled chiller efficiency requirements.				
Water Cooled, Electrically Operated, Reciprocating	All Capacities	COP	≥4.200	≥5.050	Reciprocating units must comply with water-cooled positive displacement efficiency requirements.				
Water Cooled, Electrically Operated, Positive Displacement	<264 kW	COP	≥4.450	≥5.200	≥4.509	≥5.582	≥4.396	≥5.861	
	≥264 kW and < 528 kW	COP	≥4.450	≥5.200	≥4.538	≥5.718	≥4.452	≥6.001	
	≥528 kW and < 1055 kW	COP	≥4.900	≥5.600	≥5.172	≥6.063	≥4.898	≥6.513	
	≥1055 kW	COP	≥5.500	≥6.150	≥5.672	≥6.513	≥5.504	≥7.177	
Water Cooled, Electrically Operated, Centrifugal	<528 kW	COP	≥5.000	≥5.250	≥5.547	≥5.901	≥5.504	≥7.815	
	≥528 kW and < 1055 kW	COP	≥5.550	≥5.900	≥5.547	≥5.901	≥5.504	≥7.815	
	≥1055 kW and < 2110 kW	COP	≥6.100	≥6.400	≥6.100	≥6.401	≥5.856	≥8.792	
	≥2110 kW	COP	≥6.100	≥6.400	≥6.170	≥6.525	≥5.961	≥8.792	
Air Cooled Absorption Single Effect	All Capacities	COP	≥0.600	NR ^e	≥0.600	NR ^e	NA ^d	NA ^d	ARI 560
Water-Cooled Absorption Single Effect	All Capacities	COP	≥0.700	NR ^e	≥0.700	NR ^e	NA ^d	NA ^d	
Absorption Double Effect Indirect-Fired	All Capacities	COP	≥1.000	≥1.050	≥1.000	≥1.050	NA ^d	NA ^d	
Absorption Double Effect Direct-Fired	All Capacities	COP	≥1.000	≥1.000	≥1.000	≥1.000	NA ^d	NA ^d	

a. The chiller equipment requirements do not apply for chillers used in low-temperature applications where the design leaving fluid temperature is < 4.4°C.
b. Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.
c. Compliance with this standard can be obtained by meeting the minimum requirements of Path A or Path B. However, both the full load and IPLV must be met to fulfill the requirements of Path A or Path B.
d. NA means that this requirement is not applicable and cannot be used for compliance.
e. NR means that there are no minimum requirements for this category.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Variable-air-volume fan control is currently required in the standard for multiple-zone systems. This proposal extends these requirements for large single-zone units. Important aspects of this proposal include the following:

- *It applies to both unitary (packaged) equipment and chilled water air-handling units.*
- *It only applies to units with a cooling capacity greater than or equal to 110,000 Btu/h.*
- *The proposal can be met using either two-speed motors or variable-speed drives on the supply fan(s).*
- *The minimum speed requirement is set at 67% fan speed.*
- *It does not take effect until 1/1/2012.*

This proposal has achieved industry consensus through discussions with AHRI's Large Unitary Engineering (ULE) Group. Three of the criteria were critical to achieving that consensus:

- *The lower threshold of 10 tons for unitary equipment,*
- *The 2/3 minimum threshold for fan speed, and*
- *The delay in implementation to 2012.*

The significance of the two-thirds minimum speed threshold is to prevent coil frosting on DX coils (particularly for those units that are face split). The reasoning behind the delay in implementation to 2012 is to allow the AC unit manufacturers time to redesign and test their AC units. All of the manufacturers are currently redesigning their lines to meet the 2010 phase-out of certain refrigerants (R-22). Some have already completed this work for certain product lines. The volume of units being tested for refrigerant change outs is straining the available certified testing resources.

Although this requirement does not take effect until 2012, it is believed that manufacturers will begin introducing variable-volume signal-one units in advance of that date. Utility rebate programs, LEED certification, and other incentives should encourage wider demand for these units and will help this requirement to see real savings in advance of the 2012 date.

It should be noted that a second proposal is forthcoming to address the budget systems in the Energy Cost Budget Method (see Table 11.3.2A) to make the budget systems 5, 6, 7, 9, and 11 consistent with the requirements of this proposal.

Addendum n to Standard 90.1-2007

Include new item b in Section 6.3.2 as follows. Renumber subsequent section items as appropriate (I-P units).

6.3.2 Criteria. HVAC system must meet ALL of the following criteria:

- a. The system serves a single HVAC zone.
- b. The equipment must meet the variable flow requirements of Section 6.4.3.10
- ~~(c)~~(b). Cooling (if any) shall be provided by a unitary packaged ...

Add new Section 6.4.3.10 as follows (I-P units):

6.4.3.10 Single Zone Variable-Air-Volume Controls. HVAC systems shall have variable airflow controls as follows:

- a. Effective January 1, 2010, air-handling and fan-coil units with chilled-water cooling coils and supply fans with motors greater than or equal to 5 hp shall have their supply fans controlled by two-speed motors or variable-speed drives. At cooling demands less than or equal to 50%, the supply fan controls shall be able to reduce the airflow to no greater than the larger of the following:

1. One half of the full fan speed, or
2. The volume of outdoor air required to meet the ventilation requirements of Standard 62.1.

- b. Effective January 1, 2012, all air-conditioning equipment and air-handling units with direct expansion cooling and a cooling capacity at ARI conditions greater than or equal to 110,000 Btu/h that serve single zones shall have their supply fans controlled by two-speed motors or variable-speed drives. At cooling demands less than or equal to 50%, the supply fan controls shall be able to reduce the airflow to no greater than the larger of the following:

1. Two-thirds of the full fan speed, or
2. The volume of outdoor air required to meet the ventilation requirements of Standard 62.1.

Include new item b in Section 6.3.2 as follows. Renumber subsequent section items as appropriate (SI units).

6.3.2 Criteria. HVAC system must meet ALL of the following criteria:

- a. The system serves a single HVAC zone.
- b. The equipment must meet the variable flow requirements of Section 6.4.3.10
- ~~(c)~~(b). Cooling (if any) shall be provided by a unitary packaged ...

Add new Section 6.4.3.10 as follows (SI units):

6.4.3.10 Single Zone Variable-Air-Volume Controls. HVAC systems shall have variable airflow controls as follows:

- a. Effective January 1, 2010, air-handling and fan-coil units with chilled-water cooling coils and supply fans with motors greater than or equal to 4 kW shall have their supply fans controlled by two-speed motors or variable-speed drives. At cooling demands less than or equal to 50%, the supply fan controls shall be able to reduce the airflow to no greater than the larger of the following:

1. One half of the full fan speed, or

2. The volume of outdoor air required to meet the ventilation requirements of Standard 62.1.
- b. Effective January 1, 2012, all air-conditioning equipment and air-handling units with direct expansion cooling and a cooling capacity at ARI conditions greater than or equal to 32.3 kW that serve single zones shall have their supply fans controlled by two-speed motors or variable-speed drives. At cooling demands less than or equal to 50%, the supply fan controls shall be able to reduce the airflow to no greater than the larger of the following:
 1. Two-thirds of the full fan speed, or
 2. The volume of outdoor air required to meet the ventilation requirements of Standard 62.1.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This addendum is the second phase of correcting the fan power limitation deficiencies of Standard 90.1-2004. The first phase was corrected by Addendum ac to the 2004 standard, which has been approved and is included in Standard 90.1-2007. That addendum addressed all fan systems with exception of those systems serving fume hoods. The reason for excluding fume hood systems was to allow Addendum ac to proceed, correcting a majority of the problems, and be included in the 2007 edition of Standard 90.1. This allowed time to assemble a lab working group that could properly address the needs of laboratory exhaust systems. This working group consisted of three individuals from Labs 21, three design engineers, and one person from the ECB subcommittee. This addendum provides the necessary pressure credits for

laboratory exhaust systems that allow prescriptive compliance of these systems.

Addendum p to Standard 90.1-2007

Revise the standard as follows (I-P units):

Modify the exceptions to Section 6.5.3.1.1 as follows:

Exceptions to 6.5.3.1.1:

- a. Hospital, vivarium and laboratory systems that utilize flow control devices on exhaust and/or return to maintain space pressure relationships necessary for occupant health and safety or environmental control may use variable-volume fan power limitation.
- b. Individual exhaust fans with motor nameplate horsepower of 1 hp or less.
- e. ~~Fans exhausting air from fume hoods. (Note: If this exception is taken, no related exhaust side credits shall be taken from Table 6.5.3.1.1B and the Fume Exhaust Exception Deduction must be taken from Table 6.5.3.1.1B).~~

Modify Table 6.5.3.1.1B as follows:

TABLE 6.5.3.1.1B Fan Power Limitation Pressure Drop Adjustment

Device	Adjustment
Credits	
Fully ducted return and/or exhaust air systems	0.5 in. w.c. <u>(2.15 in. w.c. for laboratory and vivarium systems)</u>
Return and/or exhaust airflow control devices	0.5 in. w.c.
Exhaust filters, scrubbers, or other exhaust treatment	The pressure drop of device calculated at fan system design condition
Particulate Filtration Credit: MERV 9 through 12	0.5 in. w.c.
Particulate Filtration Credit: MERV 13 through 15	0.9 in. w.c.
Particulate Filtration Credit: MERV 16 and greater and electronically enhanced filters	Pressure drop calculated at 2× clean filter pressure drop at fan system design condition
Carbon and other gas-phase air cleaners	Clean filter pressure drop at fan system design condition
Heat recovery device, <u>biosafety cabinet</u>	Pressure drop of device at fan system design condition
Evaporative humidifier/cooler in series with another cooling coil	Pressure drop of device at fan system design condition
Sound Attenuation Section	0.15 in. w.c.
<u>Exhaust system serving fume hoods</u>	<u>0.35 in. w.c.</u>
<u>Laboratory and vivarium exhaust systems in high-rise buildings</u>	<u>0.25 in. w.c./100 ft of vertical duct exceeding 75 ft</u>
Deductions	
Fume Hood Exhaust Exception (required if 6.5.3.1.1 Exception [e] is taken)	-1.0 in. w.c.

Revise the standard as follows (SI units):

Modify the footnotes to Table 6.5.3.1.1A as follows:

TABLE 6.5.3.1.1A Fan Power Limitation *

	Limit	Constant Volume	Variable Volume
Option 1: Fan System Motor Nameplate kW	Allowable Nameplate Motor kW	$kW \leq L/S_S \cdot 0.0017$	$kW \leq L/S_S \cdot 0.0024$
Option 2: Fan System <u>Input</u> kW	Allowable Fan System <u>Input</u> kW	$kW_i \leq L/S_S \cdot 0.0015 + A$	$kW_i \leq L/S_S \cdot 0.0021 + A$

*where

- L/S_S = the maximum design supply airflow rate to conditioned spaces served by the system in liters per second
- kW = the maximum combined motor nameplate kW
- kW_i = the maximum combined fan ~~required~~ input kW
- A = sum of $(PD \times L/S_D / 6500004434)$

where

- PD = each applicable pressure drop adjustment from Table 6.5.3.1.1B in ~~Pa~~ w.e.
- L/S_D = the design airflow through each applicable device from Table 6.5.3.1.1B in liters per second

Modify the Exceptions to 6.5.3.1.1 as follows:

Exceptions to 6.5.3.1.1:

- a. Hospital, vivarium and laboratory systems ~~systems~~ that utilize flow control devices on exhaust and/or return to maintain space pressure relationships necessary for occupant health and safety or environmental control ~~may use variable-volume fan power limitation.~~
- b. Individual exhaust fans with motor nameplate kW of 0.75 kW or less.
- e. ~~Fans exhausting air from fume hoods. (Note: If this exception is taken, no related exhaust side credits shall be taken from Table 6.5.3.1.1B and the Fume Exhaust Exception Deduction must be taken from Table 6.5.3.1.1B).~~

Modify Table 6.5.3.1.1B as follows:

TABLE 6.5.3.1.1B Fan Power Limitation Pressure Drop Adjustment

Device	Adjustment
Credits	
Fully ducted return and/or exhaust air systems	125 Pa (535 Pa for laboratory and vivarium systems)
Return and/or exhaust airflow control devices	125 Pa
Exhaust filters, scrubbers, or other exhaust treatment	The pressure drop of device calculated at fan system design condition
Particulate Filtration Credit: MERV 9 through 12	125 in w.e. Pa
Particulate Filtration Credit: MERV 13 through 15	225 in Pa
Particulate Filtration Credit: MERV 16 and greater and electronically enhanced filters	Pressure drop calculated at 2× clean filter pressure drop at fan system design condition
Carbon and other gas-phase air cleaners	Clean filter pressure drop at fan system design condition
Heat recovery device, <u>biosafety cabinet</u>	Pressure drop of device at fan system design condition
Evaporative humidifier/cooler in series with another cooling coil	Pressure drop of device at fan system design condition
Sound Attenuation Section	38 Pa
<u>Exhaust system serving fume hoods</u>	<u>85 Pa</u>
<u>Laboratory and vivarium exhaust systems in high-rise buildings</u>	<u>60 Pa/30 meters of vertical duct exceeding 25 meters</u>
Deductions	
<u>Fume Hood Exhaust Exception</u> (required if 6.5.3.1.1 Exception [e] is taken)	250 Pa

Modify Section 6.5.3.1.2 as follows:

6.5.3.1.2 Motor Nameplate kW. For each fan, the selected fan motor shall be no larger than the first available motor size greater than the input kW. The fan input kW must be indicated on the design documents to allow for compliance verification by the code official.

Exceptions to 6.5.3.1.2:

- a.e. For fans less than 4.5 kW, where the first available motor larger than the input kW has a nameplate rating within 50% of the input kW, the next larger nameplate motor size may be selected.
- b.d. For fans 4.5 kW and larger, where the first available motor larger than the input kW has a nameplate rating within 30% of the input kW, the next larger nameplate motor size may be selected.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This addendum modifies the vestibule requirements for Climate Zone 4.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum q to Standard 90.1-2007

Revise the standard as follows (I-P and SI units):

5.4.3.4 Vestibules. Building entrances that separate *conditioned space* from the exterior shall be protected with an enclosed vestibule, with all *doors* opening into and out of the vestibule equipped with self-closing devices. Vestibules shall

be designed so that in passing through the vestibule it is not necessary for the interior and exterior *doors* to open at the same time. Interior and exterior *doors* shall have a minimum distance between them of not less than 7 ft (2.1 m) when in the closed position. The exterior envelope of conditioned vestibules shall comply with the requirements for a conditioned space. The interior and exterior envelope of unconditioned vestibules shall comply with the requirements for a semi-heated space.

Exceptions:

- a. *Building entrances* with revolving *doors*.
- b. *Doors* not intended to be used as a *building entrance*.
- c. *Doors* opening directly from a *dwelling unit*.
- d. *Building entrances* in buildings located in climate zone 1 or 2.
- e. *Building entrances* in buildings located in climate zone 3 ~~or 4~~ that are less than four stories above grade and less than 10,000 ft² (930 m²) in area.
- f. *Building entrances* in buildings located in climate zone 4, 5, 6, 7, or 8 that are less than 1000 ft² (90 m²) in area.
- g. *Doors* that open directly from a *space* that is less than 3000 ft² (280 m²) in area and is separate from the *building entrance*.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

In Summer 2005, ASHRAE approved addendum g to ASHRAE/IESNA Standard 90.1-2004, which increased the minimum energy efficiency standards of commercial air-cooled air conditioners and heat pumps greater than 65,000 Btu/h. EER and COP (at 47°F) were amended, with new levels taking effect on January 1, 2010. However, IPLV and COP at 17°F were left unchanged.

This addendum updates the COP at 17°F efficiency levels for commercial heat pumps and introduces a new part-load energy efficiency descriptor for all commercial unitary products above 65,000 Btu/h of cooling capacity. The new descriptor, Integrated Energy Efficiency Ratio (IEER), is a replacement for IPLV. The IEER is a significant improvement over IPLV as it allows for uniform rating of all products

including single- and multi-stage units. It is based on a weighted average of performance at 100%, 75%, 50%, and 25% of capacity. The new part-load metric is expected to more accurately rate the part-load performance of commercial unitary equipment.

The IEER and COP at 17°F levels in Tables 6.8.1A and 6.8.1B were derived based on the expected performance of commercial unitary products meeting the new full-load EER and COP at 47°F requirements that will take effect on January 1, 2010. In addition, IEER values are now for product classes with cooling capacities between 65,000 and 240,000 Btu/h, which previously had no IPLV minimums.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striking through~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum s to 90.1-2007

Revise the Standard as follows (I-P units).

Revise Tables 6.8.1A and 6.8.1B as follows:

**TABLE 6.8.1A Electrically Operated Unitary Air Conditioners and Condensing Units—
Minimum Efficiency Requirements**

Equipment Type	Size Category	Heating Section Type	Sub-Category or Rating Condition	Minimum Efficiency ^a	Test Procedure ^b		
Air Conditioners, Air Cooled	≥65,000 Btu/h and <135,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	10.3 EER (before 1/1/2010) 11.2 EER (as of 1/1/2010) <u>11.4 IEER (as of 1/1/2010)</u>	ARI 340/360		
		All other	Split System and Single Package	10.1 EER (before 1/1/2010) 11.0 EER (as of 1/1/2010) <u>11.2 IEER (as of 1/1/2010)</u>			
	≥135,000 Btu/h and <240,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	9.7 EER (before 1/1/2010) 11.0 EER (as of 1/1/2010) <u>11.2 IEER (as of 1/1/2010)</u>			
		All other	Split System and Single Package	9.5 EER (before 1/1/2010) 10.8 EER (as of 1/1/2010) <u>11.0 IEER (as of 1/1/2010)</u>			
	≥240,000 Btu/h and <760,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	9.5 EER (before 1/1/2010) 10.0 EER (as of 1/1/2010) 9.7 IPLV (before 1/1/2010) <u>10.1 IEER (as of 1/1/2010)</u>			
		All other	Split System and Single Package	9.3 EER (before 1/1/2010) 9.8 EER (as of 1/1/2010) 9.5 IPLV (before 1/1/2010) <u>9.9 IEER (as of 1/1/2010)</u>			
	≥760,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	9.2 EER (before 1/1/2010) 9.7 EER (as of 1/1/2010) 9.4 IPLV (before 1/1/2010) <u>9.8 IEER (as of 1/1/2010)</u>			
		All other	Split System and Single Package	9.0 EER (before 1/1/2010) 9.5 EER (as of 1/1/2010) 9.2 IPLV (before 1/1/2010) <u>9.6 IEER (as of 1/1/2010)</u>			
	Air Conditioners, Water and Evaporatively Cooled	<65,000 Btu/h	All	Split System and Single Package		12.1 EER <u>12.3 IEER (as of 1/1/2010)</u>	ARI 210/240
		≥65,000 Btu/h and <135,000 Btu/h	Electric Resistance (or None)	Split System and Single Package		11.5 EER <u>11.7 IEER (as of 1/1/2010)</u>	ARI 340/360
All other			Split System and Single Package	11.3 EER <u>11.5 IEER (as of 1/1/2010)</u>			
≥135,000 Btu/h and <240,000 Btu/h		Electric Resistance (or None)	Split System and Single Package	11.0 EER <u>11.2 IEER (as of 1/1/2010)</u>			
		All other	Split System and Single Package	10.8 EER <u>11.0 IEER (as of 1/1/2010)</u>			
≥240,000 Btu/h		Electric Resistance (or None)	Split System and Single Package	11.0 EER 10.3 IPLV (before 1/1/2010) <u>11.1 IEER (as of 1/1/2010)</u>			
	All other	Split System and Single Package	10.8 EER 10.1 IPLV (before 1/1/2010) <u>10.9 IEER (as of 1/1/2010)</u>				

The remainder of the table is left unchanged.

**TABLE 6.8.1B Electrically Operated Unitary and Applied Heat Pumps—
Minimum Efficiency Requirements**

Equipment Type	Size Category	Heating Section Type	Sub-Category or Rating Condition	Minimum Efficiency ^a	Test Procedure ^b		
Air Cooled (Cooling Mode)	≥65,000 Btu/h and <135,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	10.1 EER (before 1/1/2010) 11.0 EER (as of 1/1/2010) <u>11.2 IEER (as of 1/1/2010)</u>	ARI 340/360		
		All other	Split System and Single Package	9.9 EER (before 1/1/2010) 10.8 EER (as of 1/1/2010) <u>11.0 IEER (as of 1/1/2010)</u>			
	≥135,000 Btu/h and <240,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	9.3 EER (before 1/1/2010) 10.6 EER (as of 1/1/2010) <u>10.7 IEER (as of 1/1/2010)</u>			
		All other	Split System and Single Package	9.1 EER (before 1/1/2010) 10.4 EER (as of 1/1/2010) <u>10.5 IEER (as of 1/1/2010)</u>			
	≥240,000 Btu/h	Electric Resistance (or None)	Split System and Single Package	9.0 EER (before 1/1/2010) 9.5 EER (as of 1/1/2010) 9.2 IPLV (before 1/1/2010) <u>9.6 IEER (as of 1/1/2010)</u>			
		All other	Split System and Single Package	8.8 EER (before 1/1/2010) 9.3 EER (as of 1/1/2010) 9.0 IPLV (before 1/1/2010) <u>9.4 IEER (as of 1/1/2010)</u>			
	Air Cooled (Heating Mode)	≥65,000 Btu/h and <135,000 Btu/h (Cooling Capacity)	—	47°F db/43°F wb Outdoor Air		3.2 COP (before 1/1/2010) 3.3 COP (as of 1/1/2010)	ARI 340/360
				17°F db/15°F wb Outdoor Air		2.2 COP (before 1/1/2010) <u>2.25 COP (as of 1/1/2010)</u>	
≥135,000 Btu/h (Cooling Capacity)		—	47°F db/43°F wb Outdoor Air	3.1 COP (before 1/1/2010) 3.2 COP (as of 1/1/2010)			
			17°F db/15°F wb Outdoor Air	2.0 COP (before 1/1/2010) <u>2.05 COP (as of 1/1/2010)</u>			

The remainder of the table is left unchanged.

Add the following in Section 3.2, just above IPLV:

integrated energy efficiency ratio (IEER): a single-number figure of merit expressing cooling part-load EER efficiency for commercial unitary air-conditioning and heat pump equipment on the basis of weighted operation at various load capacities for the equipment.

Modify the normative reference in Section 12 (under Air Conditioning and Refrigeration Institute) as follows:

Reference	Title
ARI 340/360-2004 7	<u>Performance Rating of Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment</u>

Revise the Standard as follows (SI units).

Revise Tables 6.8.1A and 6.8.1B as follows:

**TABLE 6.8.1A Electrically Operated Unitary Air Conditioners and Condensing Units—
Minimum Efficiency Requirements**

Equipment Type	Size Category	Heating Section Type	Sub-Category or Rating Condition	Minimum Efficiency ^a	Test Procedure ^b		
Air Conditioners, Air Cooled	≥19 kW and <40 kW	Electric Resistance (or None)	Split System and Single Package	3.02 COP (before 1/1/2010) 3.28 COP (as of 1/1/2010) <u>3.34 ICOP (as of 1/1/2010)</u>	ARI 340/360		
		All other	Split System and Single Package	2.96 COP (before 1/1/2010) 3.22 COP (as of 1/1/2010) <u>3.28 ICOP (as of 1/1/2010)</u>			
	≥40 kW and <70 kW	Electric Resistance (or None)	Split System and Single Package	2.84 COP (before 1/1/2010) 3.22 COP (as of 1/1/2010) <u>3.28 ICOP (as of 1/1/2010)</u>			
		All other	Split System and Single Package	2.78 COP (before 1/1/2010) 3.16 COP (as of 1/1/2010) <u>3.22 ICOP (as of 1/1/2010)</u>			
	≥70 kW and <223 kW	Electric Resistance (or None)	Split System and Single Package	2.78 COP (before 1/1/2010) 2.93 COP (as of 1/1/2010) 2.84 IPLV (before 1/1/2010) <u>2.96 ICOP (as of 1/1/2010)</u>			
		All other	Split System and Single Package	2.72 COP (before 1/1/2010) 2.87 COP (as of 1/1/2010) 2.78 IPLV (before 1/1/2010) <u>2.90 ICOP (as of 1/1/2010)</u>			
	≥223 kW	Electric Resistance (or None)	Split System and Single Package	2.70 COP (before 1/1/2010) 2.84 COP (as of 1/1/2010) 2.75 IPLV (before 1/1/2010) <u>2.87 ICOP (as of 1/1/2010)</u>			
		All other	Split System and Single Package	2.64 COP (before 1/1/2010) 2.78 COP (as of 1/1/2010) 2.69 IPLV (before 1/1/2010) <u>2.81 ICOP (as of 1/1/2010)</u>			
	Air Conditioners, Water and Evaporatively Cooled	<19 kW	All	Split System and Single Package		3.54 COP <u>3.60 ICOP (as of 1/1/2010)</u>	ARI 210/240
		≥19 kW and <40 kW	Electric Resistance (or None)	Split System and Single Package		3.37 COP <u>3.43 ICOP (as of 1/1/2010)</u>	ARI 340/360
			All other	Split System and Single Package		3.31 COP <u>3.37 ICOP (as of 1/1/2010)</u>	
		≥40 kW and <70 kW	Electric Resistance (or None)	Split System and Single Package		3.22 COP <u>3.28 ICOP (as of 1/1/2010)</u>	
All other			Split System and Single Package	3.16 COP <u>3.22 ICOP (as of 1/1/2010)</u>			
≥70 kW		Electric Resistance (or None)	Split System and Single Package	3.22 COP 3.02 IPLV (before 1/1/2010) <u>3.25 ICOP (as of 1/1/2010)</u>			
		All other	Split System and Single Package	3.16 COP 2.96 IPLV (before 1/1/2010) <u>3.19 ICOP (as of 1/1/2010)</u>			

The remainder of the table is left unchanged.

TABLE 6.8.1B Electrically Operated Unitary and Applied Heat Pumps—Minimum Efficiency Requirements

Equipment Type	Size Category	Heating Section Type	Sub-Category or Rating Condition	Minimum Efficiency ^a	Test Procedure ^b
Air Cooled (Cooling Mode)	≥ 19 kW and < 40 kW	Electric Resistance (or None)	Split System and Single Package	2.96 COP _C (before 1/1/2010) 3.22 COP _C (as of 1/1/2010) <u>3.28 ICOP (as of 1/1/2010)</u>	ARI 340/360
		All other	Split System and Single Package	2.90 COP _C (before 1/1/2010) 3.16 COP _C (as of 1/1/2010) <u>3.22 ICOP (as of 1/1/2010)</u>	
	≥ 40 kW and < 70 kW	Electric Resistance (or None)	Split System and Single Package	2.72 COP _C (before 1/1/2010) 3.10 COP _C (as of 1/1/2010) <u>3.13 ICOP (as of 1/1/2010)</u>	
		All other	Split System and Single Package	2.66 COP _C (before 1/1/2010) 3.04 COP _C (as of 1/1/2010) <u>3.08 ICOP (as of 1/1/2010)</u>	
	≥ 70 kW	Electric Resistance (or None)	Split System and Single Package	2.64 COP _C (before 1/1/2010) 2.78 COP _C (as of 1/1/2010) 2.70 IPLV (before 1/1/2010) <u>2.81 ICOP (as of 1/1/2010)</u>	
		All other	Split System and Single Package	2.58 COP _C (before 1/1/2010) 2.72 COP _C (as of 1/1/2010) 2.64 IPLV (before 1/1/2010) <u>2.75 ICOP (as of 1/1/2010)</u>	
Air Cooled (Heating Mode)	≥ 19 kW and < 70 kW (Cooling Capacity)	—	8.3°C db/6.1°C wb Outdoor Air	3.2 COP _H (before 1/1/2010) 3.3 COP _H (as of 1/1/2010)	ARI 340/360
		—	-8.3°C db/-9.4°C wb Outdoor Air	2.2 COP _H (before 1/1/2010) <u>2.25 COP_H (as of 1/1/2010)</u>	
	≥ 70 kW (Cooling Capacity)	—	8.3°C db/6.1°C wb Outdoor Air	3.1 COP _H (before 1/1/2010) <u>3.2 COP_H (as of 1/1/2010)</u>	
—		-8.3°C db/-9.4°C wb Outdoor Air	2.0 COP _H (before 1/1/2010) <u>2.05 COP_H (as of 1/1/2010)</u>		

The remainder of the table is left unchanged.

Modify the normative reference in Section 12 (under Air Conditioning and Refrigeration Institute) as follows:

Add the following in Section 3.2, just above IPLV:

integrated coefficient of performance (ICOP): a single-number figure of merit expressing cooling part-load COP efficiency for commercial unitary air-conditioning and heat pump equipment on the basis of weighted operation at various load capacities for the equipment (analogous to IEER, but for SI or other consistent units).

Reference	Title
ARI 340/360-20047	<u>Performance Rating of Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment</u>

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

ASHRAE/IESNA Standard 90.1 established a product class for “replacement” packaged terminal equipment to distinguish products intended to replace existing equipment in existing constructions with nonstandard external wall openings from products intended for existing and new construction with standard wall openings (16 in. high × 42 in. wide). However, the term “replacement” has been misinterpreted to mean any packaged terminal equipment intended as a replacement unit regardless of the exterior wall openings it must fit in. Conversely, the term “new construction” has been interpreted as meaning a product intended for new constructions only, while in fact it applies equally to existing and new buildings with standard wall openings.

This addendum removes the terms “replacement” and “new construction” from the product classes listed in Table 6.8.1D and replaces them with the terms “nonstandard size” and “standard size,” respectively, to clarify that one product class is intended for applications with nonstandard size exterior wall openings while the other is intended for applications with standard size exterior wall openings. The addendum also amends Section 6.4.1.5.2 and footnote b to Table 6.8.1D to

clarify that nonstandard size packaged terminal equipment have sleeves with an external wall opening less than 16 in. high **or** less than 42 in. wide to reflect existing applications where the wall opening is not necessarily less than 16 in. high **and** less than 42 in. wide. However, to avoid a potential abuse of the definition, nonstandard size packaged terminal equipment are required to have a cross-sectional area of the sleeves less than 670 in.² (less than 16 × 42 in.).

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striking through~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum t to 90.1-2007

Revise the standard as follows (I-P units).

Revise Section 6.4.1.5.2 as follows:

6.4.1.5.2 Packaged Terminal Air Conditioners. Nonstandard size packaged terminal air conditioners and heat pumps with existing sleeves sizes having an external wall opening of less than 16 in. high and or less than 42 in. wide and having a cross-sectional area less than 670 in.² shall be factory labeled as follows: *Manufactured for ~~replacement~~ nonstandard size applications only; not to be installed in new construction projects.*

Revise Table 6.8.1D as follows:

TABLE 6.8.1D Electrically Operated Packaged Terminal Air Conditioners, Packaged Terminal Heat Pumps, Single-Package Vertical Air Conditioners, Single-Package Vertical Heat Pumps, Room Air Conditioners, and Room Air Conditioner Heat Pumps—Minimum Efficiency Requirements

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	Minimum Efficiency	Test Procedure ^a
PTAC (Cooling Mode) New Construction <u>Standard Size</u>	All Capacities	95.0°F db Outdoor air	12.5 – (0.213 × Cap/ 1000) ^c EER	
PTAC (Cooling Mode) Replacements <u>Nonstandard Size^b</u>	All Capacities	95.0°F db Outdoor air	10.9 – (0.213 × Cap/ 1000) ^c EER	
PTHP (Cooling Mode) New Construction <u>Standard Size</u>	All Capacities	95.0°F db Outdoor air	12.3 – (0.213 × Cap/ 1000) ^c EER	ARI 310/380
PTHP (Cooling Mode) Replacements <u>Nonstandard Size^b</u>	All Capacities	95.0°F db Outdoor air	10.8 – (0.213 × Cap/ 1000) ^c EER	
PTHP (Heating Mode) New Construction <u>Standard Size</u>	All Capacities		3.2 – (0.026 × Cap/1000) ^c COP	
PTHP (Heating Mode) Replacements <u>Nonstandard Size^b</u>	All Capacities		2.9 – (0.026 × Cap/1000) ^c COP	

The remainder of the table is left unchanged.

Revise footnote b of Table 6.8.1D as follows:

~~b Replacement Nonstandard size~~ units must be factory labeled as follows: “MANUFACTURED FOR REPLACEMENT NONSTANDARD SIZE APPLICATIONS ONLY; NOT TO BE INSTALLED IN NEW CONSTRUCTION PROJECTS.” ~~Replacement Nonstandard size~~ efficiencies apply only to units being installed in ~~with~~ existing sleeves having an external wall opening of less than 16 in. high and or less than 42 in. wide and having a cross-sectional area less than 670 in.².

Revise the standard as follows (SI units).

Revise Section 6.4.1.5.2 as follows:

6.4.1.5.2 Packaged Terminal Air Conditioners.

~~Nonstandard size~~ Packaged terminal air conditioners and heat pumps with ~~existing sleeves~~ sizes having an external wall opening of less than 0.4 m high and or less than 1.0 m wide and having a cross-sectional area less than 0.4 m² shall be factory labeled as follows: *Manufactured for replacement nonstandard size applications only; not to be installed in new construction projects.*

Revise Table 6.8.1D as follows:

TABLE 6.8.1D Electrically Operated Packaged Terminal Air Conditioners, Packaged Terminal Heat Pumps, Single-Package Vertical Air Conditioners, Single -Package Vertical Heat Pumps, Room Air Conditioners, and Room Air Conditioner Heat Pumps—Minimum Efficiency Requirements

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	Minimum Efficiency	Test Procedure ^a
New Construction Standard Size PTAC (Cooling Mode)	All Capacities	35.0°C db Outdoor air	3.66 – (0.213 × Cap/1000) ^c COP _C	ARI 310/380
Replacements Nonstandard Size ^b PTAC (Cooling Mode)	All Capacities	35.0°C db Outdoor air	3.19 – (0.213 × Cap/1000) ^c COP _C	
New Construction Standard Size PTHP (Cooling Mode)	All Capacities	35.0°C db Outdoor air	3.60 – (0.213 × Cap/1000) ^c COP _C	
Replacements Nonstandard Size ^b PTHP (Cooling Mode)	All Capacities	35.0°C db Outdoor air	3.16 – (0.213 × Cap/1000) ^c COP _C	
New Construction Standard Size PTHP (Heating Mode)	All Capacities		3.2 – (0.026 × Cap/1000) ^c COP _H	
Replacements Nonstandard Size ^b PTHP (Heating Mode)	All Capacities		2.9 – (0.026 × Cap/1000) ^c COP _H	

The remainder of the table is left unchanged.

Revise footnote b of Table 6.8.1D as follows:

~~b Replacement Nonstandard size~~ units must be factory labeled as follows: “MANUFACTURED FOR REPLACEMENT NONSTANDARD SIZE APPLICATIONS ONLY; NOT TO BE INSTALLED IN NEW CONSTRUCTION PROJECTS.” ~~Replacement Nonstandard size~~ efficiencies apply only to units being installed in ~~with~~ existing sleeves having an external wall opening of less than 0.4 m high and or less than 1.0 m wide and having a cross-sectional area less than 0.4 m².

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Axial fan open-circuit cooling towers use approximately 50% of the energy consumed by centrifugal fan open-circuit cooling towers. Substantial energy can be saved by requiring centrifugal fan units over 1,100 US gpm at the rating conditions to meet the energy efficiency requirements for axial fan units found in Table 6.8.1G. These requirements are 38.0 gpm/hp for axial versus 20.0 gpm/hp for centrifugal, rated at 95°F entering, 85°F leaving, and 75°F entering wet-bulb temperature. This would encourage the current market trend towards lower energy axial fan designs. Exceptions are allowed for sound control and ducted installations (which might be used to reduce the potential for freezing in cold climates). Like-for-like replacements on existing buildings that would require extensive rework of the site (such as to the supporting steel) are permitted under Section 6.1.1.3, Exception b.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum u to 90.1-2007

Revise the standard as follows (I-P units).

Add a new section, Section 6.5.5.3, as follows:

6.5.5.3 Limitation on Centrifugal Fan Open-Circuit Cooling Towers. Centrifugal fan open-circuit cooling towers with a combined rated capacity of 1,100 gpm or greater at 95°F condenser water return, 85°F condenser water supply, and 75°F outdoor air wet-bulb temperature shall meet the energy efficiency requirement for axial fan open-circuit cooling towers listed in Table 6.8.1G.

Exception: Open-circuit cooling towers that are ducted (inlet or discharge) or require external sound attenuation.

Revise the standard as follows (SI units).

Add a new section, Section 6.5.5.3, as follows:

6.5.5.3 Limitation on Centrifugal Fan Open-Circuit Cooling Towers. Centrifugal fan open-circuit cooling towers with a combined rated capacity of 69.4 L/s or greater at 35°C condenser water return, 29°C condenser water supply, and 24°C outdoor air wet-bulb temperature shall meet the energy efficiency requirement for axial fan open-circuit cooling towers listed in Table 6.8.1G.

Exception: Open-circuit cooling towers that are ducted (inlet or discharge) or require external sound attenuation.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This addendum contains two changes. The first change to the footnote of Table G3.1.1A is to make it clear that Exception a to Section G3.1.1 also applies here. The second change is to the exception to G3.1.2.10 on Exhaust Air Energy Recovery for multifamily buildings because they are unlikely to have a centralized exhaust air system needed to effectively recover heat.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum w to 90.1-2007

Revise the standard as follows (I-P and SI units).

Modify the Notes to Table G3.1.1A as follows:

TABLE G3.1.1A Baseline HVAC System Types

Building Type	Fossil Fuel, Fossil/Electric Hybrid, and Purchased Heat	Electric and Other
Residential	System 1 – PTAC	System 2 – PTHP
Nonresidential & 3 Floors or Less & <25,000 ft ²	System 3 – PSZ-AC	System 4 – PSZ-HP
Nonresidential & 4 or 5 Floors & <25,000 ft ² or	System 5 – Packaged	System 6 – Packaged VAV w/PFP
5 Floors or Less & 25,000 ft ² to 150,000 ft ²	VAV w/ Reheat	Boxes
Nonresidential & More than 5 Floors or	System 7 – VAV	System 8 – VAV
>150,000 ft ²	w/Reheat	w/PFP Boxes

Notes:
 Residential building types include dormitory, hotel, motel, and multifamily. Residential space types include guest rooms, living quarters, private living space, and sleeping quarters. Other building and space types are considered nonresidential.
 Where no heating system is to be provided or no heating energy source is specified, use the “Electric and Other” heating source classification.
 Where attributes make a building eligible for more than one *baseline* system type, use the predominant condition to determine the system type for the entire building except as noted in Exception a to Section G3.1.1.
 For laboratory spaces with a minimum of 5000 cfm of exhaust, use systems type 5 or 7 and reduce the exhaust and makeup air volume to 50% of design values during unoccupied periods. For all electric buildings the heating shall be Electric Resistance.

Add Exception i to the Exceptions to Section G3.1.2.10 as follows:

G3.1.2.10 Exhaust Air Energy Recovery

...

Exceptions: If any of these exceptions apply, exhaust air energy recovery shall not be included in the *baseline building design*.

...

- i. Systems serving dwelling units in multifamily buildings.

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

A product class for heat pump pool heaters was first established in 2002 and was included in the 2004 version of ASHRAE 90.1. At that time, the minimum coefficient of performance (COP) was based on the test methods and rating conditions contained in ASHRAE Standard 146-1998. The rating conditions in Standard 146 used to rate heat pump pool heaters relied on an outdoor temperature of 80°F and an entering water temperature of 80°F.

Since then, the Air-Conditioning, Heating and Refrigeration Institute (AHRI) published ARI standard 1160 “Performance Rating of Heat Pump Pool Heaters,” which establishes testing and rating requirements for heat-pump pool heaters. The standard makes reference to ASHRAE 146 for the test

methods and provides standard rating conditions at high (80°F) and low (50°F) outdoor temperatures (the entering water temperature being at 80°F). In addition, AHRI has launched a third-party certification program to independently verify the performance ratings (heating capacity and coefficient of performance) of heat pump pool heaters claimed by manufacturers based on ARI 1160.

This proposal establishes ARI 1160 as the test procedure for heat-pump pool heaters and requires that the minimum coefficient of performance (COP) of 4 be met at the low outdoor temperature of 50°F (instead of the high outdoor temperature of 80°F currently required). These proposed changes significantly increase the stringency of ASHRAE Standard 90.1, as heat-pump pool heaters will now be required to deliver a COP of 4 at a higher temperature lift. Finally, it should be mentioned that the proposed requirements have been in place for over a year in the state of Florida, which has the largest heat pump pool heater market in the country (http://www.dca.state.fl.us/fbc/thecode/supp_051006icc_corrected0806_eff.pdf).

Addendum y to Standard 90.1-2007

Revise Table 7.8 as follows: (I-P and SI units).

TABLE 7.8 Performance Requirements for Water Heating Equipment

Equipment Type	Size Category (Input)	Subcategory or Rating Condition	Minimum Efficiency	Test Procedure ^a
Heat pump pool heaters	All	<u>50.0°F [10.0°C] db</u> <u>44.2°F [6.78°C] wb</u> <u>Outdoor air</u> <u>80.0°F [26.7°C]</u> <u>Entering Water</u>	4.0 COP	ASHRAE 146 ARI 1160

Remainder of table unchanged.

Add reference in Chapter 12 and modify as follows: (I-P and SI units).

Reference	Title
Air Conditioning and Refrigeration Institute, Air Conditioning, Heating and Refrigeration Institute 4100 North Fairfax Drive, Suite 200, Arlington, VA 22203 <u>ARI 1160-2008</u>	<u>Performance Rating of Heat Pump Pool Heaters</u>

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

Liquid-to-liquid heat exchangers are critical system components used in many buildings covered by ASHRAE Standard 90.1. Applications include, but are not limited to, free cooling with cooling towers, pressure interceptor, water-source heat pump loops, and heat recovery. The proper functioning of these heat exchangers helps to ensure that the energy efficiency of other certified equipment, such as chillers and cooling towers, is fully achieved.

A relatively new certification program for ARI Standard 400 is now being widely adopted by this industry. This certification program provides a sound engineering basis for rating the performance of liquid-to-liquid heat exchangers. Inclusion of certification requirements for this equipment will benefit both manufacturers and consumers, allow product comparisons, and provide incentives to manufacturers to improve heat exchanger efficiency in order to gain market share. This program also complements the recently adopted certification requirements for closed-circuit cooling towers (Addendum l to Standard 90.1-2007).

As these devices function to efficiently transfer heat between two fluids, no efficiency requirements are listed. Additionally, the cost for the ARI 400 certification program is similar to other ARI Certification Programs, involving thermal tests and the ARI program cost.

Lastly, the original Section 6.4.1.4f, addressing Table 6.8.1G must be deleted based on Addendum ak to Standard 90.1-2004, as requirements for CTI certification were added back in to Table 6.8.1G with that addendum, negating the original paragraph.

ARI Standard 400 can be downloaded from the ARI Web site at <http://ari.org/NR/rdonlyres/C7CA14D8-B4DD-495C-B8F4-F5A68D8C63E3/0/4002001.pdf>.

Addendum ak on cooling tower certification can be downloaded from the ASHRAE Web site at http://www.ashrae.org/doclib/20060815_200661121930_347.pdf.

Addendum ad to Standard 90.1-2007

Revise Section 6.8 as shown.

Add the following table to Section 6.8:

Revise Section 6.4.1.4 as shown.

TABLE 6.8.1K Heat Transfer Equipment

<u>Equipment Type</u>	<u>Subcategory</u>	<u>Minimum Efficiency*</u>	<u>Test Procedure†</u>
<u>Liquid-to-liquid heat exchangers</u>	<u>Plate type</u>	<u>NR</u>	<u>ARI 400</u>

* NR = No Requirement

† Section 12 contains a complete specification of the referenced test procedure, including the referenced year version of the test procedure.

6.4.1.4 Verification of Equipment Efficiencies.

Equipment efficiency information supplied by manufacturers shall be verified as follows:

- a. Equipment covered under EPACT shall comply with U.S. Department of Energy certification requirements.
- b. If a certification program exists for a covered product, and it includes provisions for verification and challenge of equipment efficiency ratings, then the product shall be listed in the certification program, or
- c. if a certification program exists for a covered product, and it includes provisions for verification and challenge of equipment efficiency ratings, but the product is not listed in the existing certification program, the ratings shall be verified by an independent laboratory test report, or
- d. if no certification program exists for a covered product, the equipment efficiency ratings shall be supported by data furnished by the manufacturer, or
- e. where components such as indoor or outdoor coils from different manufacturers are used, the system designer shall specify component efficiencies whose combined efficiency meets the minimum equipment efficiency requirements in Section 6.4.1.
- ~~f. Products covered in Table 6.8.1G shall have efficiency ratings supported by data furnished by the manufacturer.~~
- f. Requirements for plate type liquid to liquid heat exchangers are listed in Table 6.8.1K.

Add the following reference to Section 12.

12. NORMATIVE REFERENCES

<u>Reference</u>	<u>Title</u>
<u>Air Conditioning and Refrigeration Institute, Air Conditioning, Heating and Refrigeration Institute 4100 North Fairfax Drive, Suite 200, Arlington, VA 22203</u>	
<u>ARI 400-2001 with Addendum 2</u>	<u>Liquid to Liquid Heat Exchangers</u>

(This foreword is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objectors on informative material are not offered the right to appeal at ASHRAE or ANSI.)

FOREWORD

This change recognizes the practical design application of excluding bathroom lighting from “master” switch control in hotel/motel guest rooms and adds a requirement to eliminate wasted light in guest room bathrooms. Recent research shows that approximately 80% of the wasted guest room bathroom lighting can be saved with a 60-minute-limit control device. The 60-minute limit also provides ample time for any potential safety or convenience concerns related to bathrooms, such as the lights turning off too early while the bathroom is still occupied. The 5 W allowance for night lights recognizes the practical current design application of guest room bathroom night light use but at a reasonable low level.

Note: In this addendum, changes to the current standard are indicated in the text by underlining (for additions) and ~~striketrough~~ (for deletions) unless the instructions specifically mention some other means of indicating the changes.

Addendum aw to Standard 90.1-2007

Revise as follows for I-P and SI versions.

9.4.1.4 Additional Control.

- g. ~~Hotel and Motel Guest Room Lighting—hotel and motel guest rooms and guest suites shall have a master control device at the main room entry that controls all permanently installed luminaires and switched receptacles~~ Guest rooms in hotels, motels, boarding houses, and similar buildings shall have one or more control device(s) at the entry door that collectively control all permanently installed luminaires and switched receptacles, except those in the bathroom(s). Suites shall have control(s) meeting these requirements at the entry to each room or at the primary entry to the suite. Bathrooms shall have a control device installed to automatically turn off the bathroom lighting, except for night lighting not exceeding 5 W, within 60 minutes of the occupant leaving the space.

(This appendix is not part of this standard. It is merely informative and does not contain requirements necessary for conformance to the standard. It has not been processed according to the ANSI requirements for a standard and may contain material that has not been subject to public review or a consensus process. Unresolved objections on informative material are not offered the right to appeal at ASHRAE or ANSI.)

**APPENDIX
18-MONTH SUPPLEMENT
ADDENDA TO ANSI/ASHRAE/IESNA STANDARD 90.1-2007**

This supplement includes Addenda a, b, c, g, h, i, j, k, l, m, n, p, q, s, t, u, w, y, ad, and aw to ANSI/ASHRAE/IESNA Standard 90.1-2007. The following table lists each addendum and describes the way in which the standard is affected by the change. It also lists the ASHRAE, IESNA, and ANSI approval dates for each addendum.

Addendum	Section(s) Affected	Description of Changes*	ASHRAE Standards Committee Approval	ASHRAE BOD Approval	IESNA BOD Approval	ANSI Approval
a	6.8.1G	This addendum seeks to clarify that the current cooling tower requirements in the Standard apply to open-circuit cooling towers only.	6/23/2007	6/27/2007	6/12/2007	7/25/2007
b	6.5.2.3	This addendum updates the references for outdoor ventilation rates.	6/23/2007	6/27/2007	6/12/2007	7/25/2007
c	6.5.2.3	This addendum adds vivariums to the list of spaces that require specific humidity levels to satisfy process needs.	6/23/2007	6/27/2007	6/12/2007	7/25/2007
g	Section 5, Normative Appendix A.2.3	This addendum updates the building envelope criteria for metal buildings.	6/21/2008	6/25/2008	6/30/2008	6/26/2008
h	6.5.2.1	This addendum adds a new exception that is geared toward zones with direct digital controls (DDC).	6/21/2008	6/25/2008	6/30/2008	6/26/2008
i	9.4.5	This addendum applies a four-zone lighting power density approach to exterior lighting requirements.	6/21/2008	6/25/2008	6/30/2008	6/26/2008
j	Section 12, Informative Appendix E	This addendum updates references in the Standard.	1/19/2008	1/23/2008	1/28/2008	1/26/2008
k	Table 6.8.1E, Table 7.8	This addendum specifies specific sections of reference standards in Tables 6.8.1E and 7.8.	1/19/2008	1/23/2008	1/28/2008	7/24/2008
l	Table 6.8.1G, Section 12	This Addendum adds minimum efficiency and certification requirements for both axial and centrifugal fan closed-circuit cooling towers (also known as <i>fluid coolers</i>) to Table 6.8.1G. In addition, a reference to ATC-105S, the Cooling Technology Institute test standard for closed-circuit cooling towers, has been added to Section 12, Normative References.	1/19/2008	1/23/2008	1/28/2008	7/24/2008
m	Section 6.4.1.2, Table 6.8.1C	This addendum establishes effective January 1, 2010, an additional path of compliance for water-cooled chillers and also combines all water-cooled positive displacement chillers into one category and adds a new size category for centrifugal chillers at or above 600 tons	10/12/2008	10/24/2008	10/10/2008	10/27/2008

Addendum	Section(s) Affected	Description of Changes *	ASHRAE Standards Committee Approval	ASHRAE BOD Approval	IESNA BOD Approval	ANSI Approval
n	6.4.3.10	This addendum extends variable air volume fan control requirements to large single-zone units.	6/21/2008	6/25/2008	6/30/2008	6/26/2008
p	6.5.3.1.1	This addendum addresses fan power limitations to all fan systems with exception to those serving fume hoods.	6/21/2008	6/25/2008	6/30/2008	6/26/2008
q	5.4.3.4	This addendum modifies the vestibule requirements for climate zone 4.	1/19/2008	1/23/2008	1/28/2008	7/24/2008
s	Table 6.8.1A, Table 6.8.1B	This addendum updates the COP at 17°F efficiency levels for commercial heat pumps and introduces a new part load energy efficiency descriptor for all commercial unitary products above 65,000 Btu/h of cooling capacity.	10/12/2008	10/24/2008	10/10/2008	10/27/2008
t	6.4.1.5.2, Table 6.8.1D	This addendum removes the terms “replacement” and “new construction” from the product classes listed in Table 6.8.1D and replaces them with the terms “non-standard size” and “standard size,” respectively, to clarify that one product class is intended for applications with non-standard size exterior wall openings while the other is intended for applications with standard size exterior wall openings. The addendum also amends Section 6.4.1.5.2 and footnote b to Table 6.8.1D to clarify that non-standard size packaged terminal equipment have sleeves with an external wall opening less than 16 in. high or less than 42 in. wide to reflect existing applications where the wall opening is not necessarily less than 16 in. high and less than 42 in. wide.	10/12/2008	10/24/2008	10/10/2008	10/27/2008
u	6.5.5.3	This addendum adds requirements for axial fan open-circuit cooling towers.	10/12/2008	10/24/2008	10/10/2008	10/27/2008
w	Table G3.1.1A, Section G3.1.2.10	This addendum modifies requirements on exhaust air energy recovery for multifamily buildings in Appendix G.	10/12/2008	10/24/2008	10/10/2008	10/27/2008
y	Table 7.8, Section 12	This addendum establishes ARI 1160 as the test procedure for heat pump pool heaters and that the minimum COP be met at the low outdoor temperature of 50°F.	6/21/2008	6/25/2008	6/30/2008	6/26/2008
ad	Table 6.8.1K, Section 6.4.1.4, Section 12	This addendum adds requirements for liquid to liquid heat exchangers and adds a reference to AARI 400-2008.	6/21/2008	6/25/2008	6/30/2008	7/24/2008
aw	9.4.1.4	This change recognizes the practical design application of excluding bathroom lighting from “master” switch control in hotel/motel guest rooms and adds a requirement to eliminate wasted light in guest room bathrooms.	1/19/2008	1/23/2008	1/28/2008	6/26/2008

* These descriptions may not be complete and are provided for information only.

NOTE

When addenda, interpretations, or errata to this standard have been approved, they can be downloaded free of charge from the ASHRAE Web site at <http://www.ashrae.org>.

**POLICY STATEMENT DEFINING ASHRAE'S CONCERN
FOR THE ENVIRONMENTAL IMPACT OF ITS ACTIVITIES**

ASHRAE is concerned with the impact of its members' activities on both the indoor and outdoor environment. ASHRAE's members will strive to minimize any possible deleterious effect on the indoor and outdoor environment of the systems and components in their responsibility while maximizing the beneficial effects these systems provide, consistent with accepted standards and the practical state of the art.

ASHRAE's short-range goal is to ensure that the systems and components within its scope do not impact the indoor and outdoor environment to a greater extent than specified by the standards and guidelines as established by itself and other responsible bodies.

As an ongoing goal, ASHRAE will, through its Standards Committee and extensive technical committee structure, continue to generate up-to-date standards and guidelines where appropriate and adopt, recommend, and promote those new and revised standards developed by other responsible organizations.

Through its *Handbook*, appropriate chapters will contain up-to-date standards and design considerations as the material is systematically revised.

ASHRAE will take the lead with respect to dissemination of environmental information of its primary interest and will seek out and disseminate information from other responsible organizations that is pertinent, as guides to updating standards and guidelines.

The effects of the design and selection of equipment and systems will be considered within the scope of the system's intended use and expected misuse. The disposal of hazardous materials, if any, will also be considered.

ASHRAE's primary concern for environmental impact will be at the site where equipment within ASHRAE's scope operates. However, energy source selection and the possible environmental impact due to the energy source and energy transportation will be considered where possible. Recommendations concerning energy source selection should be made by its members.

